





Meet the
CONSUL

— and you will meet a car unique in its combination of big and small car advantages. Consul retains the good points of the small car — manoeuvrability, economy and suitability for crowded traffic conditions. It has also the advantages heretofore regarded as possible only in the bigger type of car — to wit, excellent top gear performance, roominess and comfort for 5-6 passengers and big car roadability and safety. It is indeed —

*The Masterpiece
for the Majority*

CONSUL

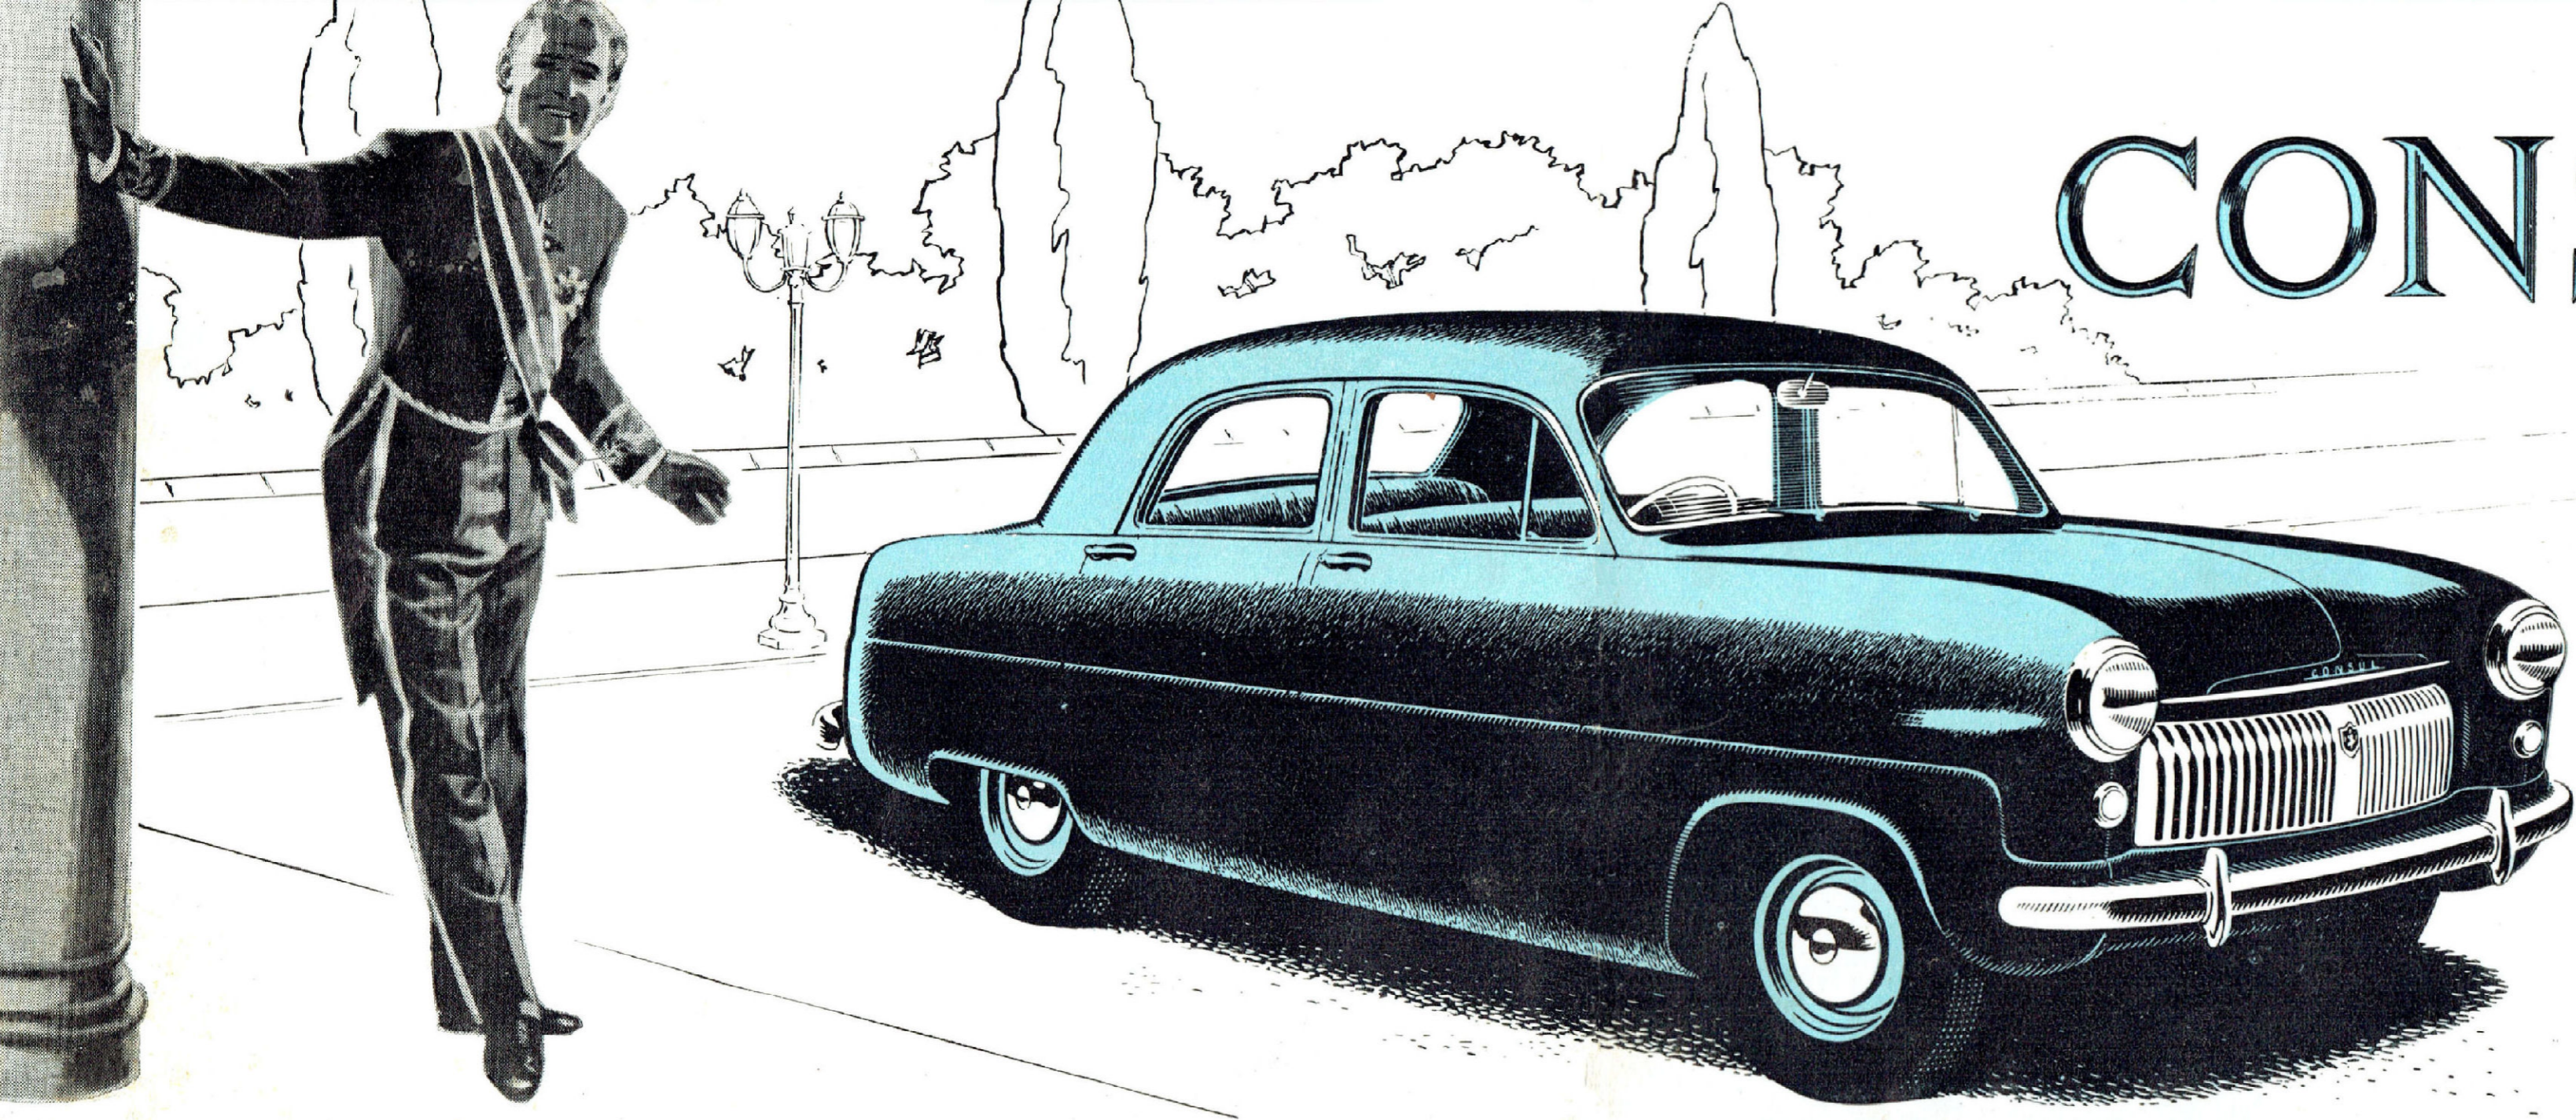

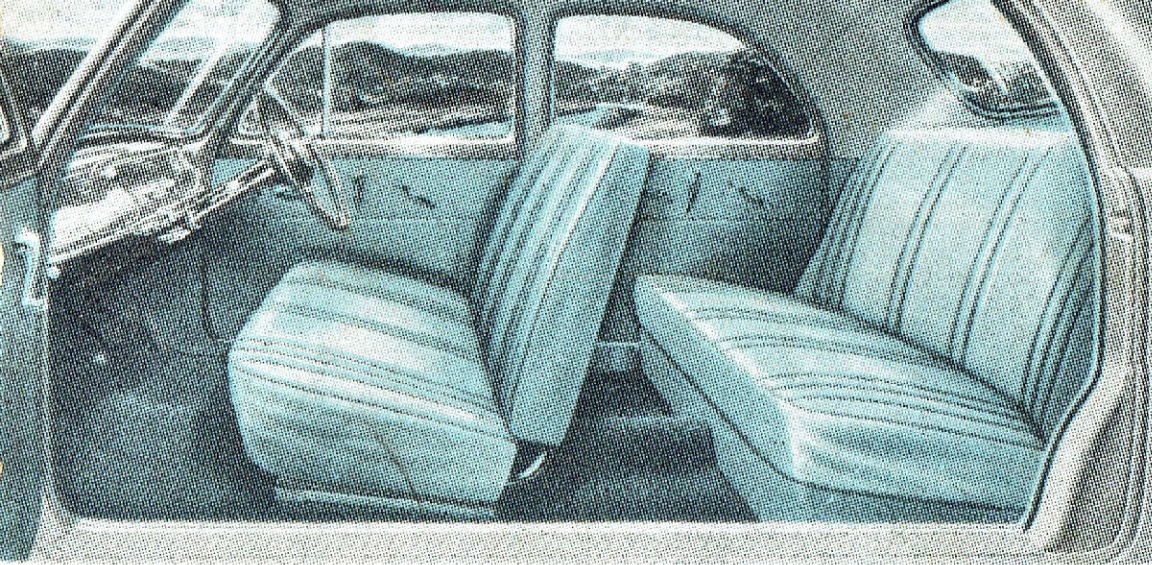

Among Consul's Distinctions is an interior styled and dimensioned to match, in unstinted comfort, the really modern body lines and remarkable road performance of this fine car. There is widespread roominess for 5-6 passengers and upholstery and fittings have the fine finish that only careful craftsmanship can provide. **FORD-BUILT . . . NOTHING COULD BE FINER.**

CONDENSED SPECIFICATIONS

ENGINE:

No. of cylinders 4
 Bore . . 3 $\frac{1}{8}$ " ; Stroke . . 3"
 Taxable H.P.

15.63 R.A.C. Rating

Max. B.H.P. 47 at 4,400 R.P.M.

Compression Ratio . . 6.8 to 1

CHASSIS:

Front Suspension:

Independent front wheel suspension employs low periodic coil springs mounted on special hydraulic, double-acting telescopic shock absorbers integral with the wheel spindle assembly. The wide spacing and high location of the springs and shock absorbers combined with accurately controlled geometry gives excellent riding and steering.

Rear Suspension:

Longitudinal, semi-elliptic leaf springs, hydraulic, double-acting shock absorbers. Hotchkiss drive.

Rear Axle:

Type — $\frac{3}{4}$ floating. Final drive gears (crown wheel and pinion)—Hypoid. Rear axle ratio — 4.625 to 1.

TRANSMISSION:

Type — 3 speeds forward
 1 reverse.

Transmission Ratios:

First 2.84 to 1
 Second 1.642 to 1
 Third (direct drive) 1 to 1
 Reverse 3.86 to 1.

BRAKES:

Footbrake:

4 wheel hydraulic, internal expanding.

Handbrake:

Mechanical application of rear brakes by lever with pistol-type grip.

STEERING SYSTEM:

High efficiency worm and peg type. Ratio 13.6 to 1. Three spoke steering wheel.

WHEELS AND TYRES:


Pressed steel wheels. Five 5.90 x 13 tyres and tubes.

GENERAL:

Wheelbase 8' 4"
 Track front 4' 2"
 rear 4' 1"
 Overall length 13' 8.73"
 Overall width 5' 3.98"
 Overall height 5' 0.75"
 Luggage Boot 15 cubic feet capacity.
 Body All-steel, welded integral construction.

Ford Motor Company of Australia Pty. Ltd., whose policy is one of continuous improvement, reserves the right subject to such regulations as may from time to time apply, to change specifications and prices at any time without notice or incurring liability to purchasers

FORD MOTOR COMPANY OF AUSTRALIA PTY. LTD.

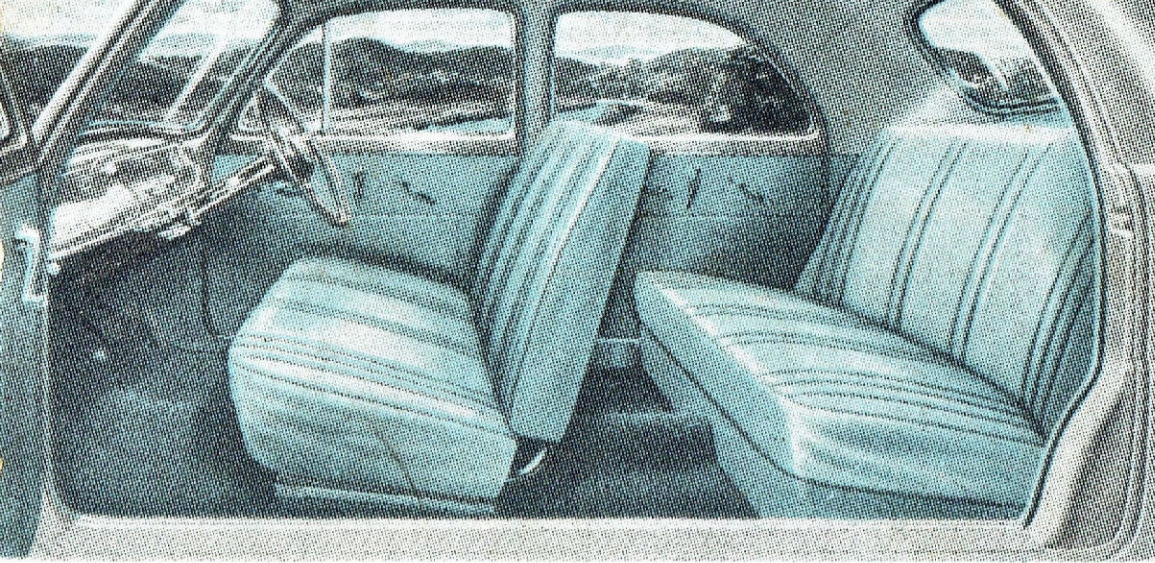

Among Consul's Distinctions is an interior styled and dimensioned to match, in unstinted comfort, the really modern body lines and remarkable road performance of this fine car. There is widespread roominess for 5-6 passengers and upholstery and fittings have the fine finish that only careful craftsmanship can provide. FORD-BUILT . . . NOTHING COULD BE FINER.

CONDENSED SPECIFICATIONS

ENGINE:

No. of cylinders . . . 4
 Bore . . 3 1/8" ; Stroke . . 3"
 Taxable H.P.

15.63 R.A.C. Rating
 Max. B.H.P. 47 at 4,400 R.P.M.
 Compression Ratio . . 6.8 to 1

CHASSIS:

Front Suspension:

Independent front wheel suspension employs low periodic coil springs mounted on special hydraulic, double-acting telescopic shock absorbers integral with the wheel spindle assembly. The wide spacing and high location of the springs and shock absorbers combined with accurately controlled geometry gives excellent riding and steering.

Rear Suspension:

Longitudinal, semi-elliptic leaf springs, hydraulic, double-acting shock absorbers. Hotchkiss drive.

Rear Axle:

Type — 3/4 floating. Final drive gears (crown wheel and pinion)—Hypoid. Rear axle ratio — 4.625 to 1.

TRANSMISSION:

Type — 3 speeds forward 1 reverse.

Transmission Ratios:

First 2.84 to 1
 Second 1.642 to 1
 Third (direct drive) 1 to 1
 Reverse 3.86 to 1.

BRAKES:

Footbrake:

4 wheel hydraulic, internal expanding.

Handbrake:

Mechanical application of rear brakes by lever with pistol-type grip.

STEERING SYSTEM:

High efficiency worm and peg type. Ratio 13.6 to 1. Three spoke steering wheel.

WHEELS AND TYRES:

Pressed steel wheels. Five 5.90 x 13 tyres and tubes.

GENERAL:

Wheelbase 8' 4"
 Track front 4' 2"
 rear 4' 1"
 Overall length 13' 8.73"
 Overall width 5' 3.98"
 Overall height 5' 0.75"
 Luggage Boot 15 cubic feet capacity.
 Body . . . All-steel, welded integral construction.

Ford Motor Company of Australia Pty. Ltd., whose policy is one of continuous improvement, reserves the right subject to such regulations as may from time to time apply, to change specifications and prices at any time without notice or incurring liability to purchasers


FORD MOTOR COMPANY OF AUSTRALIA PTY. LTD.




Meet the CONSUL

— and you will meet a car unique in its combination of big and small car advantages. Consul retains the good points of the small car — manoeuvrability, economy and suitability for crowded traffic conditions. It has also the advantages heretofore regarded as possible only in the bigger type of car — to wit, excellent top gear performance, roominess and comfort for 5-6 passengers and big car roadability and safety. It is indeed —

*The Masterpiece
for the Majority*

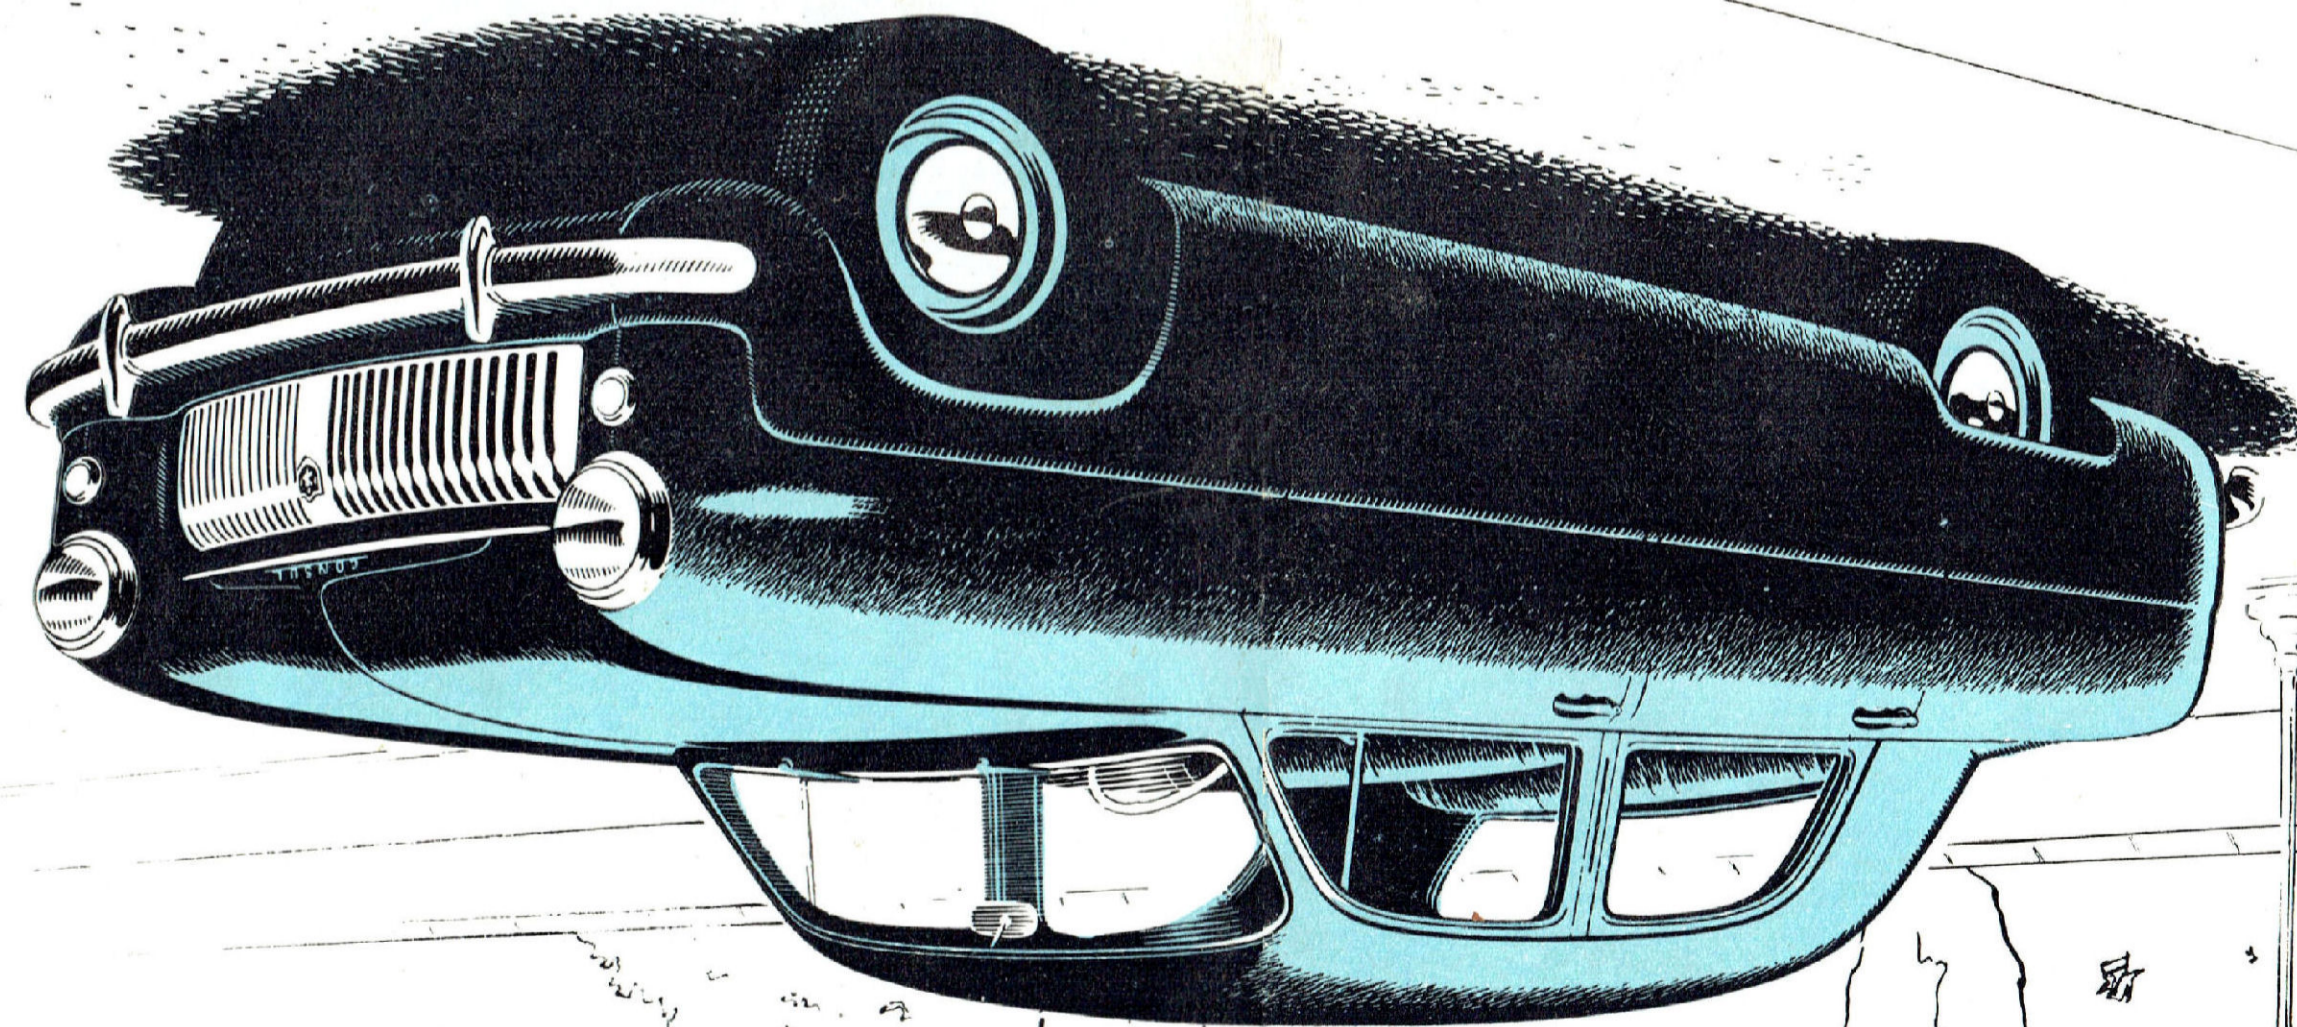


CONSUL

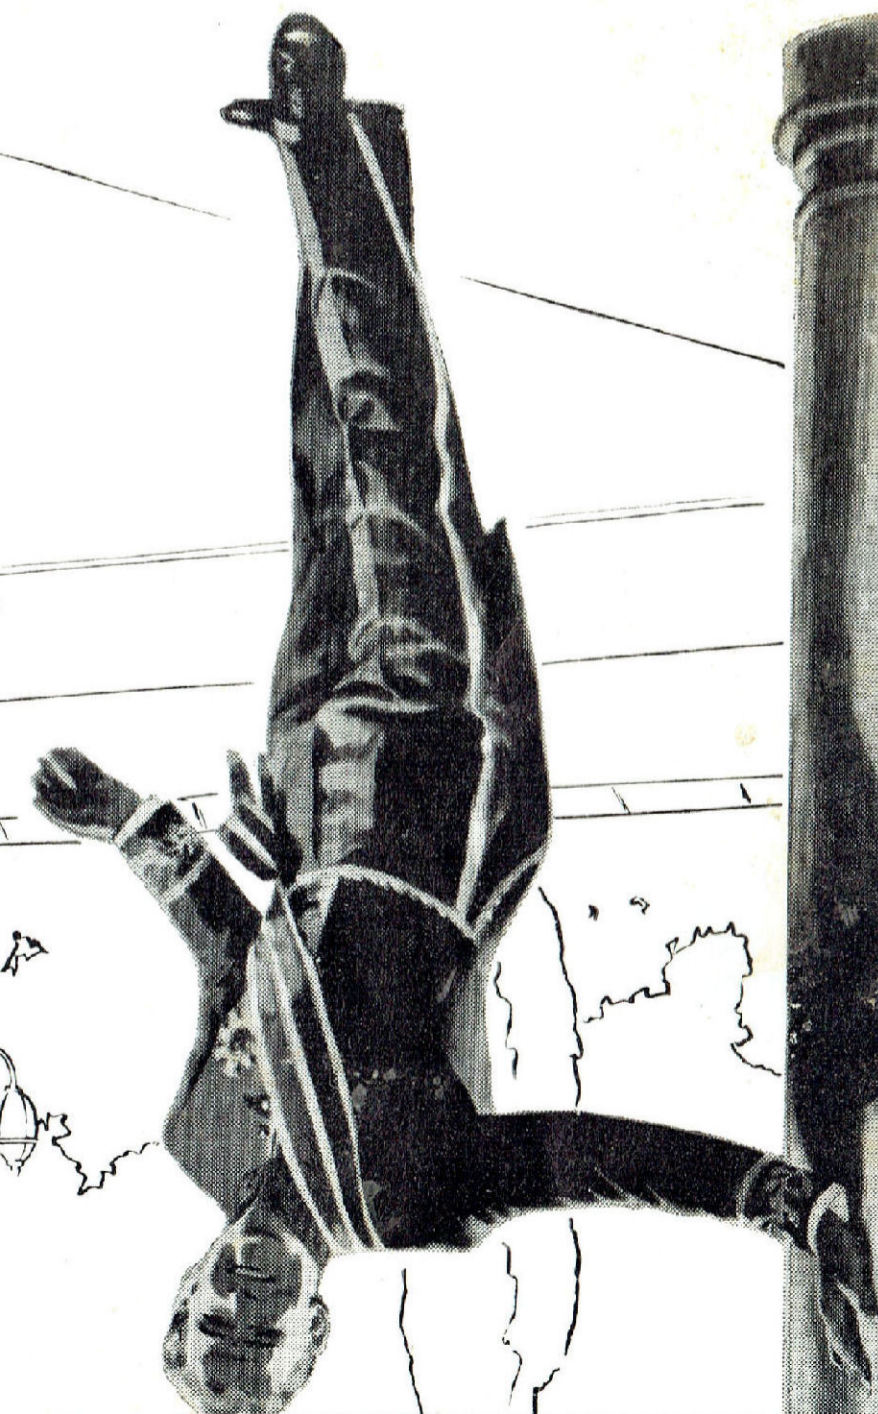

Come for a ride and you'll go for the CONSUL



HUSHED AS A SILENT NIGHT!




EASY AS FALLING OFF A LOG!
STEERING COLUMN GEAR CHANGE
SILENT SIMPLE SYNCHROMESH.




SOFT-AS-DOWN HYDRAULICALLY
OPERATED CLUTCH AND NEW
PENDANT MOUNTED CLUTCH PEDAL.



BEAUTIFUL STYLING IN
EVERY GLEAMING INCH!



QUICK OFF THE MARK WHEN
THE GREEN LIGHT SAYS "GO"




CONTROLLED VENTILATION SYSTEM
TO KEEP YOU FRESH AS A DAISY.



ALL-STEEL WELDED BODY
OF UNIT CONSTRUCTION
LIGHT SAFE, STRONG.




LIKE A CAMEL - GOES A
LONG WAY ON A LITTLE.




CENTRE-SLUNG SEATING
FOR CRADLED COMFORT!



LOTS OF LUGGAGE SPACE -
15 CUBIC FEET OF IT.

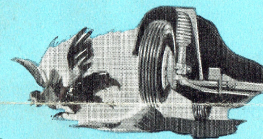


NEW DIRECT-ACTING INDEPENDENT
FRONT WHEEL SUSPENSION.




100-INCH WHEELBASE...
HANDY SIZE MAKES
PARKING A PLEASURE




WIDE TRACK FOR STABILITY ON THE ROAD.

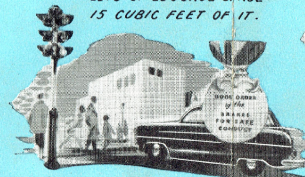

POWERFUL 9-INCH HYDRAULIC BRAKES
FOR STEADY STRAIGHT-LINE STOPS

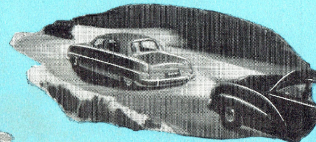

CURVED "ANTI-GLARE" WINDSCREEN AND
REAR WINDOW FOR ALL-ROUND VISIBILITY.

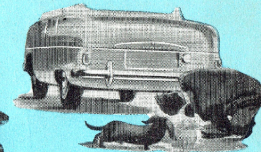


HYPOID REAR AXLE
LOW CENTRE OF GRAVITY.




DEEP SEATED COMFORT
FOR 5-0 PASSENGERS



IT'S A 15-63 H.P. JOB WHICH
DEVELOPS 47 B.H.P. AT 4,400 R.P.M.



FINE QUALITY APPOINTMENTS AND FITTINGS
ROTARY DOOR LATCHES, PRESS BUTTON DOOR HANDLES
SPRING SPOKE STEERING WHEEL, REAR MARGEL SHELF.

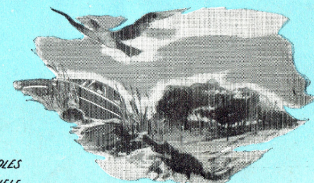

TAKES THE HILLS LIKE A BIRD!