

**BUILT FOR YOU** 




















our legendary knowledge, research, and development to the task.

passengers from danger, no standard is too high.

Because in the end, when it comes to protecting you and your

#### **SAFETY FEATURES**



**ACTIVE BRAKE ASSIST**<sup>1</sup> This advanced system senses the likelihood of a collision with a vehicle ahead and sends both a visual and audible warning followed by initiating autonomous braking.




#### **ACTIVE DISTANCE ASSIST DISTRONIC®5**

This intelligent cruise control system senses traffic conditions and actively controls your speed to keep you at a safe distance.



**360° CAMERA**<sup>6</sup> When the Reverse gear is selected, this visual parking aid uses four digital cameras to generate various views of the vehicle's surroundings and show them in real time on the multimedia display.



**ATTENTION ASSIST**<sup>®2</sup> helps prevent drowsy driving by monitoring your driving patterns and providing an early warning in case fatigue is detected.



BLIND SPOT ASSIST<sup>3</sup> has Rear Cross-Traffic Alert (RCTA)<sup>4</sup>, which employs automatic braking to avoid a collision with traffic crossing the vehicle's path (e.g., vehicles or pedestrians) when reversing.




crosswind assist<sup>7</sup> helps stabilize your van and boosts safety in strong, gusting crosswinds. This standard feature helps ensure that your vehicle remains in its lane at highway speeds.



HILL START ASSIST briefly stops the vehicle from rolling backward or forward, giving you an extra level of safety and confidence when making a hill start. Hill Start Assist maintains brake pressure for approximately two seconds, so you can remove your foot from the brake pedal without rolling.




ACTIVE LANE KEEPING ASSIST<sup>10</sup> can provide you with visual and audible warnings if your van leaves its lane unintentionally. A camera in the windshield monitors the road ahead and helps detect when you may have veered away from lane markings.



**TRAFFIC SIGN ASSIST**<sup>40</sup> uses a camera to give drivers additional help with identifying speed restriction signs, No Passing zones, and No Entry signs.



With **RESCUE ASSIST**, SM first responders to an accident can scan a QR code in a Mercedes-Benz Van to quickly see where batteries, airbags, and other structural elements are located in order to safely perform the rescue.



LOAD-ADAPTIVE ELECTRONIC STABILITY PROGRAM (ESP®)<sup>8</sup> This dynamic handling system actively intervenes to help keep the van firmly under control and safe by automatically braking individual wheels and reducing engine power to help stabilize the vehicle if wheelspin, understeer, or oversteer is detected.



DRIVER AND PASSENGER AIRBAGS°
The driver and passenger front, thorax, and window airbags° help protect you and your passengers in the event of a collision.

Sprinter airbags shown are from Model Year 2014.



HIGHBEAM ASSIST<sup>SM</sup> adjusts the highand low-beam headlamps automatically, allowing for continuous adaptation to the prevailing traffic situation. The system helps ensure better and earlier recognition of the course of the road.

**FOR PERFORMANCE** 

# Built to power your business.

Performance is about having the horsepower, torque, and hauling capabilities to handle whatever you have to do. The Sprinter gives you that confidence, and the flexibility to choose between two drivetrains. You can have turbocharged muscle and the convenience of gasoline in one package with a 4-cylinder turbocharged gasoline engine mated to an industry-leading 9G-TRONIC 9-speed transmission as standard equipment:

A 3.0L V6 turbo diesel engine<sup>11</sup> with 7-speed transmission is also available. If you don't want bad weather or road conditions to stop you from getting to work, go for the optional 4x4 drivetrain with on-demand 4-wheel drive.

"...the tried-and-true 3.0-liter V6 turbo diesel...strong pulling power, good fuel economy, and proven longevity."

- KELLEY BLUE BOOK'S KBB.COM†



Book's KBB.com. Kelley Blue Book is

#### THE EFFICIENCY OF DIESEL. THE CONVENIENCE OF GAS. IT'S YOUR CHOICE.

3.0L 6-CYLINDER TURBO DIESEL<sup>11</sup>



**CONFIGURATION:** 

DOHC

**INDUCTION SYSTEM:** 

Common-Rail-Direct-Injection (CDI)

BORE/STROKE:

83.0 mm/92.0 mm

HORSEPOWER @ RPM:

188 hp @ 3,800 rpm

TORQUE: Ib-ft @ RPM:

325 lb-ft @ 1,400-2,400 rpm

TRANSMISSION:

Automatic Transmission, 7G-TRONIC Plus

2.0L 4-CYLINDER

**TURBO GASOLINE\*** 



**CONFIGURATION:** 

DOHC

INDUCTION SYSTEM:

Bosch injection (200 bar)

BORE/STROKE:

83.0 mm/92.0 mm

HORSEPOWER @ RPM:


188 hp @ 5,000 rpm

TORQUE: lb-ft @ RPM:

258 lb-ft @ 2,500-3,500 rpm

TRANSMISSION:

Automatic Transmission, 9G-TRONIC





#### TORQUE: IT'S WHAT'S INSIDE THAT COUNTS.

Horsepower numbers are fine, but torque is what your van needs to get up to speed. What's also important is the rpm at which the peak torque numbers come in. Notice how the Sprinter's peak torque comes in at 1,400 rpm-just above an idle. This means that you'll be at peak torque quickly—and moving from a standing stop efficiently.

# BUILT

**FOR EFFICIENCY** 

# Higher satisfaction. Lower cost of ownership.

When you're looking at a commercial van, there are two cost factors to consider: the cost to buy it and the cost to own it. The Sprinter is designed to deliver cost effectiveness that lasts for years. Combine this with the van's legendary durability, and the Sprinter will keep your day-to-day costs down and your productivity up — ultimately helping your whole company run more smoothly.

In addition to lowering your total cost of ownership, the Sprinter helps keep drivers efficient and productive with amenities such as:

- Ergonomic seats with lowered sides and lumbar supports
- Comfortable pedal position
- Elimination of display reflections in windscreen
- Optimized noise reduction
- Increased steering wheel adjustability
- Multiple rear-step variations



#### **GASOLINE ENGINE**

The Sprinter offers a turbocharged 4-cylinder gasoline engine with Direct Injection and 258 lb-ft of torque as standard equipment.\*

#### **EFFICIENT DIESEL ENGINE<sup>11</sup>**

With turbocharged power, 325 lb-ft of torque, and diesel fuel economy, the Sprinter's impressive 6-cylinder engine delivers power and durability in one compact package.



### 7G-TRONIC PLUS 7-SPEED AUTOMATIC TRANSMISSION

The low first gear and overdrive high gear in the Sprinter's 7-speed automatic transmission help you accelerate from a stop and conserve fuel on the highway.



# 9G-TRONIC 9-SPEED AUTOMATIC TRANSMISSION

This transmission is a first for the segment and features rapid response, a smooth transition between gears, and efficient highway driving.



### UP TO A 20,000-MILE SERVICE INTERVAL<sup>12</sup>

The Sprinter's Best-in-Class service intervals of up to 20,000 miles<sup>12</sup> for diesel and up to 15,000 miles<sup>12</sup> for gas keep you on the road, raising productivity and lowering the total cost of ownership.



The Sprinter won the 2019 ALG Residual Value Award.<sup>13</sup>

# BUILT





Mercedes PRO connect is standard on every Sprinter.

# 3 BUNDLES FOR EVERY CONNECTIVITY NEED

#### **OPTIMIZED ASSISTANCE**



#### Services Included:

- Accident and Breakdown Management
- Emergency Call System<sup>15</sup>
- Live Traffic Information<sup>16</sup>
- Car-to-X Communication<sup>17</sup>
- Software Updates<sup>18</sup>
- Internet in the Car<sup>19</sup>
- Maintenance and Repair Management<sup>20</sup>
- Online Map Update<sup>21</sup>
- Navigation Functions<sup>22</sup>
- Multimedia Functions<sup>23</sup>

#### **EFFICIENT FLEET MANAGEMENT**



#### Services Included:

- Remote Control<sup>24</sup>
- Vehicle Supervision<sup>25</sup>
- Eco Monitor
- Drive Style Monitor
- Vehicle Operations<sup>26</sup>
- Fleet Communication incl. Send2Car<sup>27</sup>
- Digital Driver's Log<sup>28</sup>
- Digital Trip Management
- Theft Warning<sup>29</sup>

## DATA INTERFACE MERCEDES-BENZ VANS



#### Services Included:

- Vehicle Data
   Interface extended
- Vehicle Data Interface light

# MERCEDES PRO CONNECT IS MADE UP OF THE FOLLOWING ELEMENTS



# MERCEDES PRO CONNECT APP<sup>30</sup> —the direct line to the driver.

The driver can easily access valuable vehicle- and job-related information.



## VEHICLE MANAGEMENT TOOL<sup>31</sup> —the control center.

The fleet manager's customized hub of connectivity that provides a comprehensive overview of fleet resources—simplifying logistics and increasing productivity.



## COMMUNICATION MODULE<sup>32</sup> -standard in every Sprinter.

This is the central point of contact that ensures the broadest range of connectivity, quickly transmitting data with the permanently installed 4G LTE SIM card.

#### **BENEFITS AT A GLANCE**

#### FOR THE BUSINESS OWNER


- Increase overall business efficiency
- Easy location of a stolen vehicle through the Vehicle Management Tool, which shows the vehicle's current position
- Potential for a reduction in fuel consumption and therefore lower fuel costs

#### **FOR THE DRIVER**

- Effective assistance in case of an emergency
- Makes work easier as vehicle remote control also works when the vehicle key is not available
- More efficient working procedures as addresses can be directly adopted into the vehicle's navigation system for faster arrival


#### FOR THE FLEET MANAGER

- Integration into multi-brand vehicle management systems
- Clear overview of the fleet as each vehicle's information is clearly shown in the Vehicle Management Tool
- Trips can be planned more efficiently and on shorter notice as the fleet manager has all the current data available at a glance





# **BUILT**

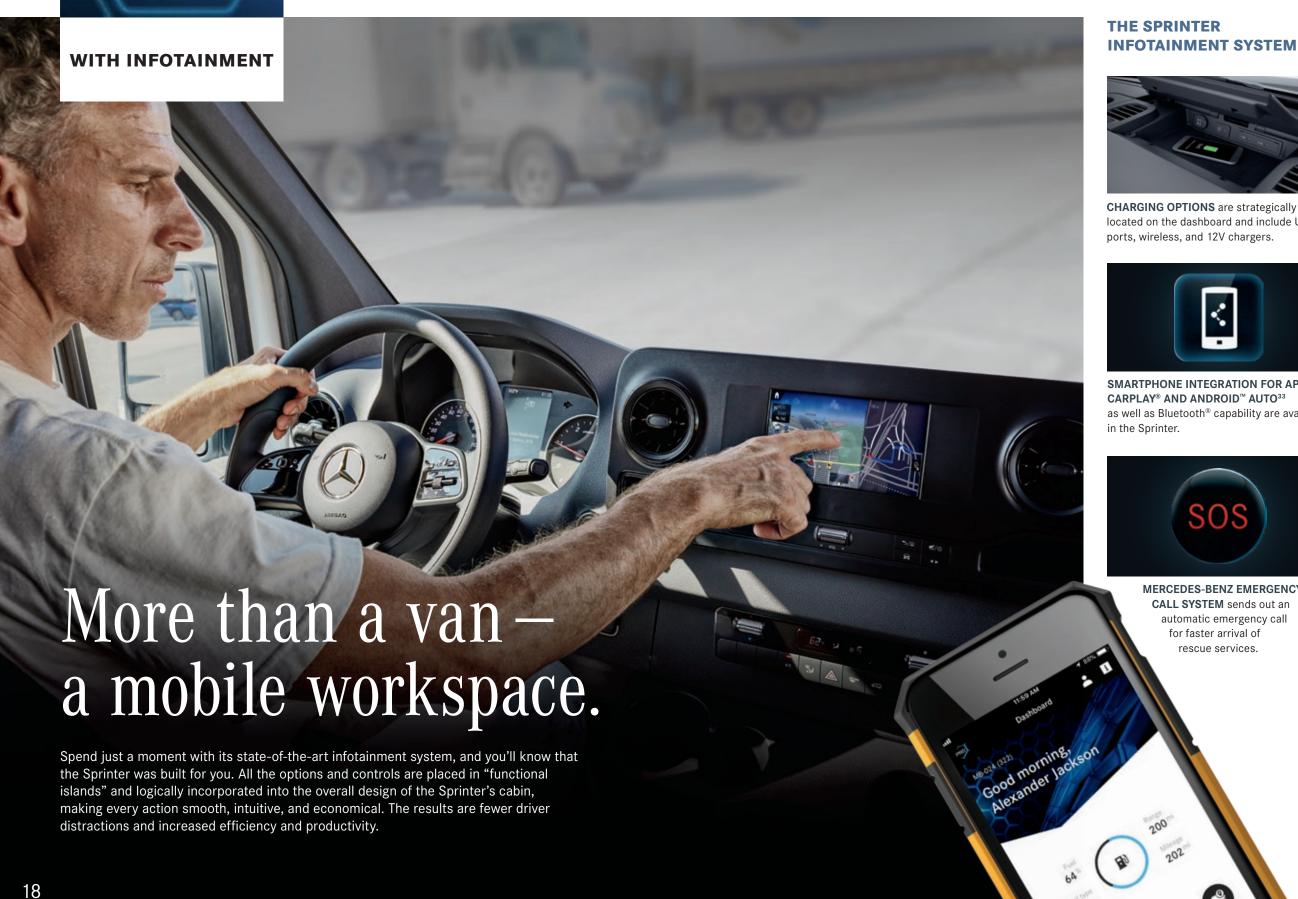

# **INFOTAINMENT SYSTEM FEATURES:**



located on the dashboard and include USB-C ports, wireless, and 12V chargers.



**LIVE TRAFFIC INFORMATION** provides traffic data in real time for more efficient traveling to and from work.



SMARTPHONE INTEGRATION FOR APPLE CARPLAY® AND ANDROID™ AUTO<sup>33</sup> as well as Bluetooth® capability are available



WIRELESS INTERNET ACCESS<sup>19</sup> provides a highly stable connection that allows for the use of mobile devices in the vehicle.



CALL SYSTEM sends out an automatic emergency call for faster arrival of



THE INNOVATIVE MBUX (MERCEDES-BENZ **USER EXPERIENCE)** delivers content from navigation to entertainment and includes optional LINGUATRONIC "Hey Mercedes" voice control and what3words, our geocoded map system.



7" AND 10.25" TOUCHSCREENS Display screens that are activated via touch, voice control, or touch buttons on the steering wheel are available on the Sprinter.





# Thousands of configurations. Unlimited potential.

When we say the Sprinter is built for you, we mean that literally.

Choose from thousands of features, configurations, and upfit solutions that give you the ability to build a van that's ready to work for you now, and prepared to carry your business into the future. It's the difference between a van that you merely drive and a van that is driven to help you succeed.

Maximum effort.

Whatever your work demands are, the Sprinter Cargo Van gives you the flexibility to create

a configuration to meet your exact needs. The 1500 is a lighter-duty model that delivers big-time productivity. For serious hauling capability, the 4500 model will handle your heaviest jobs. There's also a

2500, a 3500, and a 3500XD model. Whichever you choose, the service intervals of up to 20,000 miles<sup>12</sup> for

diesel and up to 15,000 miles<sup>12</sup> for gasoline will keep your productivity high and your cost of ownership low.

Sprinter Cargo Vans are available in 1500, 2500, 3500, 3500XD, and 4500 series.

#### **SPECIFICATIONS**



Available on the Single tire models, this wheel arch covering's square shape and flat top provide extra storage opportunities, as well as protection for the wheel arch.



The rear doors feature hinges with self-locking mechanisms.



LED strip lighting improves cargoloading vision.



Pallet bracing and tie-downs help when hauling cargo with unusual sizes and shapes34



The Sprinter 4500 model sets the benchmark for payload capacity of up to 6,768 lbs.

#### **TWO ROOF HEIGHTS**

STANDARD ROOF

Max: 95.5"

**HIGH ROOF** Max: 95.5"

Max: 97.9'



Max: 109.1"



#### **THREE LENGTHS**



233.5" (144" WB) 274.3" (170" WB) 290" (170" EXT. WB)

#### **SPRINTER CARGO QUICK FACTS**

**MAXIMUM PAYLOAD:** 

6,768 lbs.



**MAXIMUM CARGO VOLUME:** 532.6 cu. ft.



MAXIMUM TOWING CAPACITY:35 7,500 lbs.



MAXIMUM CARGO FLOOR LENGTH: 189.4"



TRANSMISSIONS:

9G-TRONIC 9-speed Automatic Transmission, 7G-TRONIC Plus 7-speed Automatic Transmission

2.0L 4-cylinder turbo gasoline,\* 3.0L 6-cylinder turbo diesel11

MAXIMUM CARGO FLOOR WIDTH:

MAXIMUM INTERIOR STANDING HEIGHT: 79.1"

\*Gasoline engine not available on all models. Available Summer 2020

All measurements in inches. All width measurements include mirrors. See page 40 for a complete listing of models and specifications.

Sprinter Crew Vans are available in 2500, 3500, 3500XD, and 4500 series.

Carrying you forward.

Once again, we've created a van to fulfill a specific need. The Sprinter Crew Van seats

up to five and still has room for material or cargo. To fulfill the need for power and desire for


the convenience of gasoline, a 4-cylinder turbocharged gasoline engine with a Best-in-Class

9G-TRONIC 9-speed transmission is standard equipment. A V6 turbo diesel engine and 7-speed

#### **SPECIFICATIONS**



The removable 3-seat bench is covered in durable upholstery and gives your crew a roomy, safe, and comfortable ride.



In addition to seating for up to five people, the Sprinter Crew Van features ample cargo space.

#### **TWO ROOF HEIGHTS**

STANDARD ROOF Max: 95.5"

Max: 97.9"

Max: 109.1



**HIGH ROOF** 

Max: 95.5"

#### **TWO LENGTHS**



233.5" (144" WB)

274.3" (170" WB)

#### **SPRINTER CREW QUICK FACTS**



MAXIMUM PAYLOAD: 6,382 lbs.



MAXIMUM CARGO VOLUME:

370.8 cu. ft.



MAXIMUM TOWING CAPACITY:35



MAXIMUM CARGO FLOOR LENGTH:

\*Gasoline engine not available on all models. Available Summer 2020.

All measurements in inches. All width measurements include mirrors. See page 42 for a complete listing of models and specifications.



2.0L 4-cylinder turbo gasoline,\* 3.0L 6-cylinder turbo diesel<sup>11</sup>



75.5"



#### TRANSMISSIONS:

9G-TRONIC 9-speed Automatic Transmission, 7G-TRONIC Plus 7-speed Automatic Transmission



**SEATING CAPACITY:** Up to five

transmission is also available.

Mercedes-Benz can deliver.

**Sprinter Passenger Vans are** available in 1500 & 2500 series.

Seats 15. Stands alone.

Looking to carry more passengers? The Sprinter accomplishes that in a big way with seating for

ample room for luggage. All the while, you'll know that they're protected by a level of safety only

up to 15 people.\* USB-C ports can keep them connected, and the spacious rear storage area provides

#### **SPECIFICATIONS**

The Sprinter Passenger Van offers seating for up to



An impressive interior standing height of up to 6'3" provides greater passenger comfort with plenty of room to move



Roof air conditioning comes in two output levels, including a high-performance air conditioner.



The ergonomic rear seats have individual headrests and an available reclining option.



The maximum 69.8" floor width and generous legroom mean there's plenty of room to sit and stretch out.

#### **TWO ROOF HEIGHTS**

STANDARD ROOF

Max: 92.3"

Max: 102.8"

Max: 114.2"



**HIGH ROOF** 

Max: 92.3"

#### **TWO LENGTHS**



233.5" (144" WB)

274.3" (170" WB)

#### **TWO INTERIOR CONFIGURATIONS**

12-PASSENGER (144" WB

15-PASSENGER (170" WB)<sup>3</sup>

#### **SPRINTER PASSENGER QUICK FACTS**

**MAXIMUM PAYLOAD:** 3,417 lbs.



MAXIMUM CARGO VOLUME: 111.2 cu. ft.



**MAXIMUM TOWING CAPACITY:35** 5,000 lbs.



TRANSMISSIONS: 9G-TRONIC 9-speed Automatic Transmission, 7G-TRONIC Plus 7-speed Automatic Transmission



2.0L 4-cylinder turbo gasoline, 3.0L 6-cylinder turbo diesel11



MAXIMUM INTERIOR STANDING HEIGHT:



STANDARD FRONT + REAR A/C



**SEATING CAPACITY:** Up to 15\*

All measurements in inches. All width measurements include mirrors. See page 45 for a complete listing of models and specifications.

<sup>\*</sup>Seating for 15 only available on diesel model.

<sup>†</sup>Gasoline engine not available on all models. Available Summer 2020.

Sprinter Cab Chassis/Cutaway Vans are available in 3500XD & 4500 series.

Built for your future.

A successful future starts with a strong foundation. That's exactly what the Sprinter Cab Chassis/Cutaway gives you. From a box truck to a technologically

advanced RV, its flat unobstructed frame rails let you design virtually anything you'd like. Motivation for your plans comes from the powerful and efficient V6 turbo diesel engine<sup>11</sup> with a 7G-TRONIC Plus 7-speed automatic transmission.

#### **SPECIFICATIONS**



Choose between the standard 3500XD model (GVWR of 11,030 lbs.) or the optional 4500 model (GVWR of 12,125 lbs.) and build the Sprinter Cab Chassis/Cutaway that works best for you.



The Sprinter's flat unobstructed frame rails are the perfect place to bring your vision of the ideal business vehicle to life.

#### **ONE ROOF HEIGHT**



#### **TWO LENGTHS**



#### **SPRINTER CAB CHASSIS/CUTAWAY QUICK FACTS**



#### MAXIMUM PAYLOAD:

7,429 lbs.



#### ENGINE:

3.0L 6-cylinder turbo diesel<sup>11</sup>



#### TRANSMISSION:

7G-TRONIC Plus 7-speed Automatic Transmission



#### MAXIMUM TOWING CAPACITY:35

7,500 lbs.



#### SEATING CAPACITY:

Up to three

30

Sprinter 4x4 Vans are available in 2500 & 3500XD series.



#### **PASSENGER**

#### **TWO ROOF HEIGHTS**

#### STANDARD ROOF

Max: 92.3"

**HIGH ROOF** 

Max: 92.3"

#### **ONE LENGTH**



233.5" (144" WB)

#### **CREW**

#### **TWO ROOF HEIGHTS**

Max: 111.3"

#### STANDARD ROOF

Max: 95.5"

Max: 107.3"

**HIGH ROOF** 

Max: 95.5"



#### **TWO LENGTHS**



233.5" (144" WB)

274.3" (1**70**" WB)

**THREE LENGTHS** 

#### **CARGO**

#### **TWO ROOF HEIGHTS**

#### STANDARD ROOF

Max: 95.5"

**HIGH ROOF** 

Max: 95.5"



233.5" (144" WB)

274.3" (1**70**" WB)

290" (170" EXT. WB)

All measurements in inches. All width measurements include mirrors. A complete listing of models and specifications begins on page 40.

# MASTER UPFITTER





# Your one stop for productivity.

You're the expert in your trade, and your van is the tool with which to get the job done. MasterSolutions<sup>™36</sup> allows you to quickly configure your van and order directly via your Mercedes-Benz Vans dealer to get you exactly the van you want right when you need it, so you can concentrate on finishing the job.

Build your van now or get inspired by visiting the **MasterSolutions**™<sup>36</sup> **Configurator.** 

MasterSolutions<sup>™36</sup> providers Auto Truck, Knapheide, and Driverge bring you a portfolio of turnkey solutions for your specific line of business−HVAC, Plumbing, Electrical, Telecommunication, Contracting, Delivery, Refrigeration, Food Services, and People Moving−all at a preferred price. These preconfigured solutions from industry-leading manufacturers are customized to fit your Mercedes-Benz Van. The ordering process is streamlined, and installation is simple: all MasterSolutions<sup>™36</sup> can be fitted directly as Ship-Thru, right next to our factory in South Carolina, which saves you time and ensures seamless integration, quick delivery, and consistent quality.











is here to support your needs. Find your MasterUpfitter today.





These simple-interest, fixed-payment packages lock in interest rates and can include van and upfit equipment, as well as aftermarket products, in one contract.

A closed-end lease agreement is also known as a "walkaway lease," since the lessee can simply turn in the vehicle and walk away at lease maturity after meeting all contractual obligations, subject to certain return conditions and mileage restrictions.

A Terminal Rental Adjustment Clause (TRAC) lease<sup>38</sup> doesn't require any acquisition fee, up-front payment, or excess mileage charges, and lease payments may be expensed against income. Owners are responsible for the residual value of the vehicle.

# We have your back.

VanCARE is a promise to our customers to deliver genuine parts, superior service, and unparalleled commitment to getting you back on the road as quickly as possible. We know that for you, it isn't a van—it's a tool you need to make a living.


For more information, visit www.mbvans.com/sprinter/mercedes-van-parts-and-services

#### **ROADSIDE ASSISTANCE<sup>39</sup>**

All Mercedes-Benz Vans come standard with our 24-hour Roadside Assistance Program<sup>39</sup> and expert advice 24/7 through the Mercedes-Benz Customer Assistance Center, providing you with peace of mind and help when you need it most.

#### ServiceCARE - Service solutions built for you

Whether it's a maintenance service, unexpected warranty work, or now a wear and tear repair, our ServiceCARE products are customized solutions for you. You can now focus on your business with your vehicles always in top shape, minimizing your downtime and maximizing your financial cost control.

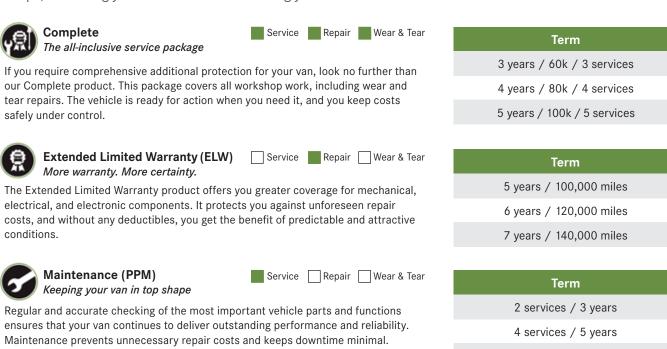

Regular and accurate checking of the most importa	nt vehicle parts and functions	2 services / 3 years
ensures that your van continues to deliver outstand Maintenance prevents unnecessary repair costs an	01	4 services / 5 years
atonanoo protonto atossoca y topan oooto a	a neepe aemame minima.	6 services / 7 years
Manufacturer Warranty Overview	3 year / 36k	5 year / 100k
New Vehicle Warranty	•	
Powertrain Warranty		•
Diesel Engine Limited Warranty		•
Federal Emissions Warranty Diesel		•

# SPRINTER OVERVIEW

# Applies to all Sprinter models

POWERTRAINS	ENGIN	IE
	2.0L 4-Cylinder Turbo Gasoline*	3.0L V6 Turbo Diesel
Configuration	DOHC	DOHC
Fuel injection	Direct	Direct
Induction system	Bosch Injection	Common-Rail-Direct-Injection
Cylinders	4	6
Cylinder heads	Aluminum	Aluminum
Block material	Aluminum	Aluminum
Bore/stroke	83.0mm/92.0mm	83.0mm/92.0mm
Compression ratio	9.8:1	18.0:1
Transmission	9G-TRONIC 9-Speed Automatic Transmission	7G-TRONIC Plus 7-Speed Automatic Transmission
Horsepower @ rpm	188 hp @ 5,000 rpm	188 hp @ 3,800 rpm
Torque Ib-ft @ rpm	258 lb-ft @ 2,500-3,500 rpm	325 lb-ft @ 1,400-2,400 rpm
Recommended fuel	Regular 87 Octane	B5 Diesel
Fuel tank capacity	22 gal	24.5 gal

	STANDARD	FEATURES	
	MECHA	ANICAL	
Gasoline engine only	Diesel engine only	Gasoline and Diesel engines	
Engine: 2.0L 4-Cylinder Turbo Gasoline	• Engine: 3.0L V6 Turbo Diesel	Body Builder Connector	Pre-installation PSM
9G-TRONIC 9-Speed Automatic Transmission	7G-TRONIC Plus 7-Speed Automatic Transmission	Exhaust Straight to Rear	Pre-wiring for Trailer Hitch
AGM battery 12V/70Ah	Alternator 14V/220A	Jump-Start Terminal	Remote Key (315mhz) with Central Locking
Generator 14V/250A	3rd Generation SCR Emission Control System	Pre-installation for Switch Panel (not available on 4x4)	Starter Battery Disconnect
SULEV Emissions	• ULEV/SULEV Emissions <sup>†</sup>		
• Service Interval: Up to 15,000 miles 12	• Fuel Filter with Water Separator		
	• Service Interval: Up to 20,000 miles <sup>12</sup>		
SEATING	EXTERIOR	INTER	RIOR
Adjustable Driver Seat	Dual-Circuit 4-Wheel Disc Brakes	Adjustable Steering Wheel (Angle)	Outside Temperature Gauge
Adjustable Front Passenger Seat	Front and Rear Mudflaps	Air Conditioning, Front	Shelf Above Windshield
Armrest for Driver's Seat	Rear Doors Opening to Side-Wall (optional on 144" & 170" models)	Communication Module (LTE) for Digital Services	Speedometer, mph
Armrest for Front Passenger Seat	Red Diesel Filler Cap (Diesel only)	Cupholder, Front	Standard Radio
Fabric, Maturin Black	Windshield with Filter Band	Heater, Auxiliary Electric Hot Air	Storage Compartment Underneath Cockpit
		• Jack, Hydraulic	• USB-C Socket, 5V
		Keyless-Start	
TIRES & WHEELS		SAFETY & SECURITY	
All-Season Tires	• 4-Wheel Anti-Lock Braking System (ABS)	Emergency Call System	<ul> <li>Load-Adaptive Electronic Stability Program (ESP®)<sup>8</sup></li> </ul>
Unspecified Tire Brand	Airbag, Driver/Passenger Front	Headlight Assistant	Seat Belt Reminder, Driver/ Passenger
	Breakdown Management	Hill Start Assist	• Thorax-Pelvis Side Airbags, Driver/ Passenger
	• Crosswind Assist <sup>7</sup>	HOLD Function	• Window Side Airbags, Driver/ Passenger

			SPRINTER MOI	DEL OVERVIEW			
Body L	ength	Roof Heights	1500 Model	2500 Model	3500 Model	3500XD Model	4500 Model
	STANDARD	STANDARD ROOF	G	G D 4×4	0	0 4×4	0
	(144")	HIGH ROOF	G	6 D 4×4	0	0 4×4	0
CARGO VAN	LONG (170")	HIGH ROOF		6 D 4×4	0	0 4×4	0
	EXTRA LONG (170" EXT)	HIGH ROOF		0 4×4	0	0 4×4	0
	STANDARD	STANDARD ROOF		6 D 4×4		0 4×4	0
CREW VAN	(144")	HIGH ROOF		6 0 4×4	0	0 4×4	0
	LONG (170")	HIGH ROOF		6 D 4×4	0	0 4×4	0
	STANDARD (144")	STANDARD ROOF	G	6 D 4×4			
PASSENGER VAN	12-PASSENGER	HIGH ROOF	G	6 0 4×4			
	LONG (170") 15-PASSENGER	HIGH ROOF		0			
CAB CHASSIS/	STANDARD (144")	STANDARD ROOF				D	0
CUTAWAY	LONG (170")	STANDARD ROOF				D	0



															-		1	96
ADDITIONAL STANDARD FEATURES (CARGO)	00	00	3500	350080	OOXD	4500		00	2500	3500	3500XD	4500		00	2500	3500	3500XD	
MECHANICAL	1500	2500				$\rightarrow$		1500			-	-		1500	25		_	_
Aux. fuel sending unit with fuel tap**	Х	X			X   :	Х	Cable duct – side-wall	Х	Х	Χ	X	X	Stabilization Level II			X	X	1
Axle ratio 3.923**	<u> </u>	X		$\pm$			Front axle reinforced	V			ļ.,	X	Tire pressure monitoring lamp	Х	X	上	L	1
Axle ratio 4.182 (standard on 2500 gas models only)	X	X				<u> </u>	Omission bulkhead	X	X	Χ	X	X						
Cable duct - rear portal	X	X	(   X	. 12	X   :	X	Stabilization Level I	X	Х		_	_						
INTERIOR  Interior lights, cargo compartment	Х	X	X		X []	X	Wood floor deletion	Х	Х	Χ	Х	Х						
EXTERIOR	Lv	Lv	d v	. Is	. I :	_	TIRES & WHEELS				Lv	Lv	TIRES & WHEELS (CONTINUED)			Lv	Lv	Т
3rd brake light     High roof	X	X	X		X   ]	Х	5.5 J x 16 steel wheels     6.5 J x 16 steel wheels	Х	_	Х	X	Х	Tires LT 215/85 R16     Tires LT 245/75 R16	X	-	X	I X	ł
Rear doors, 180° opening	X	ĺχ			x   :	x	Dual rear wheel tires	<del> ^</del>	_	Χ	Х	Х	SAFETY & SECURITY	_^	1 ^	_	_	1
Rear mudflaps	X						Spare wheel	Х	Х	Χ	X	X	Longitudinal member reinforcement	Χ	X	X	X	T
Sliding door, passenger side	Х					Χİ	Spare wheel bracket below frame	X	Χ	Χ	Χ	Χ	Rearview camera (rearview mirror display)	Χ	Χ	Χ	Χ	1
OPTIONAL FEATURES (CARGO)	1500	2500	3500	250070	OXDOS	4500		1500	2500	3500	3500XD	4500		1500	2500	3500	3500XD	
MECHANICAL	- V					_	• ACM bottom: 12V 05Ab 050A	X	X		_		• Frant avia vainfareed (standard on 4500 model)			m V	-	-
12V power outlet, rear compartment     115V socket	X	X				X   X	AGM battery 12V 95Ah 850A     Axle ratio 3.923**	^	٨	X	X	X	Front axle reinforced (standard on 4500 model)     Fuel gauge, optimized for aux. fuel tap**	Х	X	X	X	
Additional bar for driveshaft	X	T <sub>X</sub>	$\neg$	$\neg$	$\neg$	X	Axle ratio 4.182 (optional on 2500 diesel models only)		Х		Ĺ		Misfueling prevention for diesel	Χ	Х	X	X	
& exhaust extension	^	\_^	1^	1	^	^	Backup alarm	X	Х	X	X	Χ	Omission of D-Rings	Χ	Х	Х	X	
<ul> <li>Additional battery for retrofit consumers, driver seat base</li> </ul>	X	X	(   x		x   :	χŀ	Cruise control     Cutoff relay for additional battery	X	X	X	X	X	Parametric Special Module (PSM)     Speed limitation, 65 mph (standard on 4500 models)	X	X	X	X	
Additional battery for retrofit consumers,	\ \ \	1,	1	Τ,	,		Deactivation lamp monitoring failure	ΙŶ	X	X	Ϋ́	Ιŵ	Stabilization Level II	X	X	<del> </del> ^	╁	t
engine compartment	X					X	Electric parking brake	X	Х				Suspension for comfort and load protection	Χ	X			1
Additional DIN-slots	X	X	(   X	( )	X [ ]	ΧĮ	Engine oil level display at cold start**	L	X	Χ	X	X	Top speed limitation, 75 mph	Χ	X	X	X	1
SEATING																		
Artico Man-made Leather Black Fabric, Caluma Black	X	X	(   X (   X		X   : X   :	<u>х  </u> х	Heated driver seat	ΙX	X	X	X	X	Heated front passenger seat	X	X	ΙX	X	1
NTERIOR																		
2nd row, fixed window, driver side	X	X	X			ΧŢ	Electrically heated windshield	X	Х	Χ	Х	Х	Pallet support in sliding door step	Χ	Х	X	X	I
2nd row, fixed window, passenger side	X	X					Fixed sunroof (rear roof section)	X	X	X	X	X	Rear cabin heater & vents	X	X	X	X	4
Acoustic Package     Assist handle, B-pillar	X	X				$\rightarrow$	Floor covering, plastic     Fuel-fired heater/booster (17,000 BTU)**	Х	X	X	X	X	Rear doors, opening to side-wall     Rear heater prep	X	X	X	X	+
Assist handle, left rear door	X	T <sub>X</sub>		_		_	Fuel-fired pre-heater/booster (17,000 BTU)**	$\vdash$	X	X	X	X	Rear window defroster	X	X	X	l^	t
Assist handle, right rear door	X	X					Half height load compartment trim	Х	Χ	Χ	Х	Х	Roof fan, electric	Χ	X	X	X	1
Cab rear wall liner	Х	X				$\rightarrow$	Heat insulation, front compartment	Х	Χ	Χ	Χ	Χ	Satellite radio	Χ	Χ	Х	Х	
Cargo lashing rails, head height	X	X					Heat insulation, rear compartment	X	X	X	X	X	Shelving prep	X	X	X	X	4
Cargo partition     Cargo partition with one window	X	X				-	Hinged lid for storage compartment     Illuminated front exits	X	X	X	X	X	Side-wall paneling full hardboard     Side-wall paneling waist height PVC	X	X	X	I X	+
Cargo straps, D-rings <sup>34</sup>	Ιχ	T <sub>X</sub>				_	Instrument cluster with color display	X	X	X	X	X	Storage compartment above cabin	^	<del> </del> ^	l^	Ιâ	-
Cargo straps, lashing rails <sup>34</sup>	X	X			x [ ]	x	Keys, two additional masters	X	Χ	Χ	Χ	Χ	THERMOTRONIC automatic climate control	Χ	Х	Х	X	
Charging Package, dashboard	Х	X			X []	ΧŢ	Lashing rails, floor-level (plus four anchors)	Х	Χ	Χ	Х	Χ	Tray for smartphones incl. wireless charging	Χ	Х	X	X	Т
Cigarette lighter & ash cup, front	X	X	X				Lashing rails, waist-level	X	Χ	Χ	X	X	Wood floor with six D-rings <sup>34</sup>	Χ	X	Χ	X	1
Coat hooks in driver cabin	X	ΤX	X	1	X   ;		Light/motion sensor in rear compartment	X	X	X	X	X						
DEF fluid filler cap – lockable     Door-mounted assist handle,	X	_	X	$\neg$	X   ]		Multifunction steering wheel	X	X									
driver & passenger  Door sill – protective edge	X						Optional 3-button keys     Overhead storage slot, front center	X	X	X	X	X						
YTERIOR									_				TIRES & WHEELS		_			
ATERIUR		$\overline{}$		_	-		Heated rear window(s) with washers/wipers	X	Х	Χ	X	X	285/65 R 16 C SUPER-SINGLE-TIRES (Super Single)			X	Ιx	1
	X	X	( x	)	x [	х	Treated real willdow(s) with washers/ wipers				Χ	Χ	Light-alloy wheels 6.5 J x 16	Χ	Х		Ħ	f
Black tinting (90%) for rear windows	_	Τx	(Tx	d	x 1:	х	High roof (standard on 3500)	Χ	Χ						X	V	V	4
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey	_	Τx	(Tx	d	x 1:	Х	High roof (standard on 3500)     Mounting rails for roof rack	X	X	X	X	Ϋ́	Loadable wheel arch	X	ı X	X	X	1
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, spring-loaded**1	_	Τx	(Tx		X :	X X	High roof (standard on 3500)	X X X	X	_X_	X	X X		X X	X		X	1
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, spring-loaded**†  Deletion of "model" badge, right rear door  Deletion of Sprinter badge, left rear door	X X X X	X X X X			X X X	X X X	High roof (standard on 3500)     Mounting rails for roof rack     Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings	X	X X X	X X	X X X X	X	Loadable wheel arch     M+S winter tires     Rims painted Arctic White     Rims painted Jet Black	X X X	X X	X		
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, spring-loaded**†  Deletion of "model" badge, right rear door  Deletion of Sprinter badge, left rear door  Elec. closing assist left sliding door (soft close)	X X X X X	X X X X X			X X X X X X	X X X X	High roof (standard on 3500)     Mounting rails for roof rack     Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door, driver side	X	X X X X	X X X	X X X X	X X	Loadable wheel arch     M+S winter tires     Rims painted Arctic White     Rims painted Jet Black     Spare tire carrier deletion	X	X X X	X X	X	
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, spring-loaded**1  Deletion of "model" badge, right rear door  Delection of Sprinter badge, left rear door  Elec. closing assist left sliding door (soft close)  Elec. closing assist right sliding door (soft close)	X X X X X X X	X X X X X X	( X ( X ( X ( X ( X ( X		X X X X X X X X	X X X X	High roof (standard on 3500)     Mounting rails for roof rack     Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings	X X X X	X X X X X	X X X X X	X X X X X X	X	Loadable wheel arch     M+S winter tires     Rims painted Arctic White     Rims painted Jet Black	X	X X X X X X	X X X X	X X	
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, spring-loaded**† Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close) Elec. closing assist right sliding door (soft close) Electric sliding door right Electric sliding step	X X X X X X X X	X X X X X X X	( X ( X ( X ( X ( X ( X ( X		X X X X X X X X X X X X X X X X X X X	X X X X X	High roof (standard on 3500)     Mounting rails for roof rack     Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door, driver side     Sliding door, right-side deletion     Sliding door, two-stage opening     Step, wide, at rear end	X X X X	X X X X X	X X X X X X	X X X X X X X	X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental	X	X X X X	X X X X X	X X X	
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, spring-loaded**†  Deletion of "model" badge, right rear door  Delection of Sprinter badge, left rear door  Elec. closing assist left sliding door (soft close)  Electric sliding door right  Electric sliding step  Electrically folding exterior mirrors	X X X X X X X X	X X X X X X X	( X ( X ( X ( X ( X ( X ( X ( X ( X		X X X X X X X X X X X X X X X X X X X	X X X X X X	High roof (standard on 3500)     Mounting rails for roof rack     Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door, driver side     Sliding door, right-side deletion     Sliding door, two-stage opening     Step, wide, at rear end     Trailer crossmember 7,500-lb. capacity	X X X X X	X X X X X X	X X X X X X X	X X X X X X X X	X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho	X	X X X X X	X X X X X X	X X X X X	
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, spring-loaded**† Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close) Elec. closing assist left sliding door (soft close) Electric sliding door right Electric sliding step Electrically folding exterior mirrors Fixed window center left Fixed window center right	X X X X X X X X X X X X	X X X X X X X X X X	( X ( X ( X ( X ( X ( X ( X ( X ( X ( X		X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer crossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170" EXT on 3500, 3500XD & 4500 models)	X X X X X	X X X X X X X	X X X X X X X	X X X X X X X X	X X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Steel wheels: 8.5 J x 16 Rr; 6.5 J x 16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Michelin* Wheel chocks	X X X X X	X X X	X X X X	X X X X X X	
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, Spring-loaded**† Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close) Elec. closing assist right sliding door (soft close) Electric sliding door right Electric sliding step Electrically folding exterior mirrors Fixed window center left Fixed window center right Half-sided step rear (for trailer hitch)	X X X X X X X X X X X X	X X X X X X X	( X ( X ( X ( X ( X ( X ( X ( X ( X ( X		X X X X X X X X X X X X X X X X X X X	X X X X X X X X	High roof (standard on 3500)     Mounting rails for roof rack     Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door, driver side     Sliding door, right-side deletion     Sliding door, two-stage opening     Step, wide, at rear end     Trailer crossmember 7,500-lb. capacity     Trailer hitch, 5,000 lbs. (available only for 170" EXT on 3500, 3500XD & 4500 models)     Windows in rear doors	X X X X X	X X X X X X X	X X X X X X X	X X X X X X X X	X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Steel wheels: 8.5 J x16 Rr, 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Michelin* Wheel chocks Wheelhouse covering	X X X X X	X X X X X X X	X X X X	X X X X X X	
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, spring-loaded**† Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close) Electric sliding door right Electric sliding step Electric sliding step Electrically folding exterior mirrors Fixed window center left Fixed window center right Half-sided step rear (for trailer hitch)  SAFETY & SECURITY	X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	(		X X X X X X X X X X X X X X X X X X X	X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer crossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170° EXT on 3500, 3500XD & 4500 models) Windows in rear doors  OPTIONAL PACKAGES	X X X X X X	X X X X X X X X	X X X X X X X X X	X X X X X X X X X X	X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Arctic White Rims painted Set Black Spare tire carrier deletion Spare wheel deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Michelin* Wheel chocks Wheelhouse covering  OPTIONAL PACKAGES (CONTINUED)	X X X X X X	X X X X	X X X X	X X X X	
Black tinting (90%) for rear windows Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, spring-loaded*** Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close) Elec. closing assist left sliding door (soft close) Electric sliding door right Electric sliding door right Electric sliding step Electrically folding exterior mirrors Fixed window center left Fixed window center right Half-sided step rear (for trailer hitch)  SAFETY & SECURITY Active Distance Assist DISTRONIC**	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	(		X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer crossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170" EXT on 3500, 3500XD & 4500 models) Windows in rear doors  OPTIONAL PACKAGES Bench Seat Package	X X X X X X	X X X X X X X X X	X X X X X X X X X	X X X X X X X X X	X X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Arctic White Rims painted Section Spare tire carrier deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Continental Tire Brand Michelin* Wheel chocks Wheelhouse covering  OPTIONAL PACKAGES (CONTINUED) Driver Convenience Package	X X X X X	X X X X	X X X X X	X X X X X	
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, spring-loaded**1  Deletion of "model" badge, right rear door  Deletion of Sprinter badge, left rear door  Elec. closing assist left sliding door (soft close)  Elec. closing assist right sliding door (soft close)  Electric sliding door right  Electrically folding exterior mirrors  Fixed window center left  Fixed window center right  Half-sided step rear (for trailer hitch)  SAFETY & SECURITY  Active Distance Assist DISTRONIC*5  Blind Spot Assist3	X X X X X X X X X X X X X X X X X X X	X	(		X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer crossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170° EXT on 3500, 3500XD & 4500 models) Windows in rear doors  OPTIONAL PACKAGES	X X X X X X X X X	X X X X X X X X X X X X	X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X	X X X X X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Arctic White Rims painted Set Black Spare tire carrier deletion Spare wheel deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Michelin* Wheel chocks Wheelhouse covering  OPTIONAL PACKAGES (CONTINUED)	X X X X X X X	X X X X X	X X X X X	X X X X X	
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, Spring-loaded**†  Deletion of "model" badge, right rear door  Elec. closing assist left sliding door (soft close)  Elec. closing assist right sliding door (soft close)  Elec. closing assist right sliding door (soft close)  Electric sliding door right  Electric sliding step  Electrically folding exterior mirrors  Fixed window center left  Fixed window center right  Half-sided step rear (for trailer hitch)  SAFETY & SECURITY  Active Distance Assist DISTRONIC*5  Blind Spot Assist*  Emergency flashlight  First-aid kit	X X X X X X X X X X X X X X X X X X X	X	(		X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer rossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170° EXT on 3500, 3500XD & 4500 models) Windows in rear doors  OPTIONAL PACKAGES Bench Seat Package Cargo Convenience Package Cargo Protection Package Cargo Protection Package Chrome Grille Package	X X X X X X X X X	X X X X X X X X X X X X X	X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Arctic White Rims painted Metic White Rims painted State Spare tire carrier deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Kumho Tire Brand Kumho Wheel chocks Wheel chocks Wheelhouse covering  OPTIONAL PACKAGES (CONTINUED) Driver Convenience Package Exterior Lighting Package Heavy-Duty-Cargo Protection Package Premium Package	X X X X X X X X X	X X X X X	X X X X X X	X   X   X   X   X   X   X	
Bumpers front/rear primed Bumper step, rear, Grey Bumper step, rear, spring-loaded** <sup>1</sup> Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close) Elec. closing assist right sliding door (soft close) Electric sliding door right Electric sliding step Electric sliding step Electrically folding exterior mirrors Fixed window center left Fixed window center right Half-sided step rear (for trailer hitch)  SAFETY & SECURITY Active Distance Assist DISTRONIC*5 Blind Spot Assist³ Emergency flashlight First-aid kit Fog lamp with cornering light function	X X X X X X X X X X X X X X X X X X X	X	(		X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer crossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170" EXT on 3500, 3500XD & 4500 models) Windows in rear doors  OPTIONAL PACKAGES Bench Seat Package Cargo Convenience Package Cargo Forection Package Cargo Forection Package Chrome Grille Package Comfort Package	X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Arctic White Rims painted Set Black Spare tire carrier deletion Stele wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Kumho Wheel chocks Wheel chocks Wheelhouse covering  OPTIONAL PACKAGES (CONTINUED) Driver Convenience Package Exterior Lighting Package Heavy-Duty-Cargo Protection Package Premium Package Premium Plus Package	X X X X X X X X X X X X X X X X	X X X X X X X	X   X   X   X   X   X   X   X   X   X	X   X   X   X   X   X   X	
Black tinting (90%) for rear windows  Bumpers front/rear primed  Bumper step, rear, Grey  Bumper step, rear, Spring-loaded***  Deletion of "sprinter badge, right rear door  Elec. closing assist left sliding door (soft close)  Elec. closing assist right sliding door (soft close)  Elec. closing assist right sliding door (soft close)  Electric sliding door righ  Electric sliding step  Electric sliding step  Electrically folding exterior mirrors  Fixed window center left  Fixed window center right  Half-sided step rear (for trailer hitch)  SAFETY & SECURITY  Active Distance Assist DISTRONIC**  Blind Spot Assist*  Emergency flashlight  First-aid kit	X X X X X X X X X X X X X X X X X X X	X	(		X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X	High roof (standard on 3500) Mounting rails for roof rack Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door, driver side Sliding door, right-side deletion Sliding door, two-stage opening Step, wide, at rear end Trailer rossmember 7,500-lb. capacity Trailer hitch, 5,000 lbs. (available only for 170° EXT on 3500, 3500XD & 4500 models) Windows in rear doors  OPTIONAL PACKAGES Bench Seat Package Cargo Convenience Package Cargo Protection Package Cargo Protection Package Chrome Grille Package	X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	X X X X X X X X X X X X X X X X X X X	Loadable wheel arch M+S winter tires Rims painted Arctic White Rims painted Arctic White Rims painted Metic White Rims painted State Spare tire carrier deletion Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single) Tire Brand Continental Tire Brand Kumho Tire Brand Kumho Tire Brand Kumho Wheel chocks Wheel chocks Wheelhouse covering  OPTIONAL PACKAGES (CONTINUED) Driver Convenience Package Exterior Lighting Package Heavy-Duty-Cargo Protection Package Premium Package	X X X X X X X X X	X X X X X	X X X X X X	X   X   X   X   X   X   X	

\* Delayed availability on 3500, 3500XD, and 4500 models.

\* Not available with gasoline engine.

<sup>†</sup> Not available with 4x4.

For a complete listing of features included in each package, build your van at MBVans.com

#### **SPRINTER CREW**



MODERNICAL	ADDITIONAL STANDARD FEATURES											1 1 1 1
** A. A. Ce and conting not with the fallow   X   X   X   X   * Process due referenced   X   X   X   X   * Description (and the continued of t				Š					OXC	l		
** As that design get the thin set lay   X   X   X   X   * Front also Restrock	MECHANICAL	250(	350	3500	150		250(	3 2 0 (	3500	150		2500 3500 3500)
** Also desire of 250 generated complete (complete)  ** Also Set placement of 250 generated complete (complete placement)  ** Also Set placement of the complete placement of						Front axle reinforced	111		.,		Stabilization Level II	
HEATHOR    Million armount   Million								Х	Χ	Х	Tire pressure monitoring lamp	X
** Also due du minust	Axle ratio 4.182 (standard on 2500 gas models only)	<u>  X</u>	ΙX	ΙX	ΙX	Stabilization Level I	X			L		
Institute   Company   Co	SEATING											
Note State A plate in the control of	Aisle-side armrest	X	X	X	X		$ _{X} $	χl	Х	X	Wall-side armrest	X   X   X   2
** Asset hours, Epilar	NTERIOR					first row (narrow); includes ISOFIX	1			L.,		
- Ruse futing (PAT) for and unknowness - Completing (PAT) - Completing		Тх	Ιx	Тх	Τx	Interior lights, cargo compartment	TXT	χТ	Χ	Ιχ	Wheelhouse covering	X   X   X
** Time of comparisoned time **  ** Time of the comparisoned time of the comparison	7 1			X	X			X	Χ	X	-	XXX
** Submitted files de compantment man   X   X   X   X   X   X   X   X   X												
THESE WHELE (COMPINION)  THESE SWITCHS  THESE SWITC							X	X				
- 2 of son, filed vindred, gainer size of comparison of the compar	Hair neight load compartment trim		ΙΛ	ΙΛ	17	warm/cool air duct to rear compartment	1 / 1	<u> </u>	Λ	L		
** 2 of true fund window, pursuenger allow ** X				_		1					· · · · · · · · · · · · · · · · · · ·	
** Internal light of the comment of			ΙX	-				Х	X	X		XXX
** Light roof** **   X   X   X   X   X   Spars wheel   X   X   X   X   X   X   X   X   X			X					Y	Υ	Y	• Tires LI 245//5 R I6	IXII
** Lambratide glass tears**  ** New methods**  ** Additional basiner for divershelf it is measured enteriors.*  ** New methods**  ** Additional basiner for methods**  ** Additional basiner for methods**  ** Additional basiner for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners for retrofic consumens, condriver said basiners.*  ** Additional basiners.*							1x1	χÌ	X	Ιχ		
**BRETTING BOOK, SECURITY**  **Longitudinal member reinforcement**    X   X   X   X   X   X   X   X   X	Laminated glass rear	X	X	X	Х		X	X	X	X		
SECTY & SECURITY  - Conglictedian member eniforcement  X   X   X   X   X   Représe camera (narviese minor display)  NECHANICAL  - Additional basing revention consumers, and a security of the												
APETY & SECURITY  - Longitudinal member reinforcement    X   X   X   X   X   X   X   X   X	•		X		X							
OPTIONAL FEATURES (CREW)    Comment	- Gliuliig uooi, passeriger side	1 \	ΙΛ	ΙΛ	ΙX							
DETIONAL FEATURES (CREW)    B   B   B   B   B   B   B   B   B												
* Additional barfor driveshaft & exhaust extension **  **Additional barfor or terrolls* consumers, co-driver seed tasse**  **Additional barfory for refrolls* consumers, co-driver seed tasse**  **Additional barfory for refrolls* consumers, co-driver seed tasse**  **Additional barfory for refrolls* consumers, engine compartment **  **X	Longitudinal member reinforcement	X	ΙX	X	X	Rearview camera (rearview mirror display)	X	X I	Χ	X		
* Additional barfor driveshaft & exhaust extension **  **Additional barfor or terrolls* consumers, co-driver seed tasse**  **Additional barfory for refrolls* consumers, co-driver seed tasse**  **Additional barfory for refrolls* consumers, co-driver seed tasse**  **Additional barfory for refrolls* consumers, engine compartment **  **X		I				I	, ,					1 1 1 1
* Additional barry for driveshoff & Acomasci extension**  **A charlation**  **A char	OPTIONAL FEATURES (CREW)			ē					٥			
* Additional barry for driveshoff & Acomasci extension**  **A charlation**  **A char			8	6	8			8	00	8		2500 3500 3500)
* Additional battery for returbit consumers, or offered inconsumers, or offered inconsumers, and	MECHANICAL				-			35	35	45		
documents and basis with the property of the consumers, and distinguish laterty for retrofit consumers, with the property of the property of the consumers, and distinguish laterty for retrofit consumers, with the property of the property of the consumers, with the property of the prope	Additional bar for driveshaft & exhaust extension	X	X	X	X							
** Additional bottery for retrofit consumers, engine comparations of the part	Additional battery for retrofit consumers,     co-driver seat base.	X	X	Ιx	x							
Additional DNA-lostos  X X X X Engine on lived displays a clost start**  X X X X X X X X X X X X X X X X X X		+	1	١	١.,			分	X			
**AGM battery 12V 95Ah 850A		X	X	X	X					<u> </u>		
**Alor End S. 922***    X   X   X   * Parametric Special Module (PSM)   X   X   X   X   X   X   X   X   X								X	Χ	Х		
SEATING  - Action Mammade Leather Black  - Action Mammade Leather Black  - X   X   X   X   X   X   X   X   X   X	· · · · · · · · · · · · · · · · · · ·	X							X	-		
** Artico Aluma Black	- Axie 18110 3.723		1^	1^	1 ^	- Tarametric Special Module (FSM)	1/1	^ 1	Λ	<u>  ^</u>	l	
**NTERIOR**  **INTERIOR**  **INTERIOR**  **ISV power outlet, rear compartment		Loc	1	L	1		1 1					I and an I and I
NTERIOR  * 12V yower outlet, rear compartment  X X X X * Rear heater prep  X X X * Sear heater prep  X X X * Sear heater prep  X X X * Rear heater prep  X X X X * Rear heater pre				X		Heated driver seat	X	ΧĮ	Χ	<u>  X</u>	Heated front passenger seat	<u> </u>
137 yower outlet, rear compartment	rabilo, Galama Black	17	IX	17	17	1						
• 1151 Socketet         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X		Lv	Lv	Lv	Lv		LvI	v I		Lv		LVLVLVL
- Acoustic Package		$+\frac{x}{x}$	₽¥									XXX
- Assist handle, left rear door						0						
- Assist handle, right rear door		$\frac{1}{x}$										XXX
- Cargo straps, D-rings**  X X X X X Leather steering wheel  X X X X X - Loadable wheel arch  Charging Package, dashboard  X X X X - Loadable wheel arch  X X X X - Loadable wheel arch  X X X X X - Loadable wheel arch  X X X X X - Loadable wheel arch  X X X X X X X X X X X X X X X X X X X		X				Keys, two additional masters						X X X
Cigarette lighter & ash cup, front	Cargo straps, D-rings <sup>34</sup>					Leather steering wheel		Χ	Χ	Х	Tray for smartphones incl. wireless charging	ng XXX
Door-mounted assist handle, driver & passenger											Wood floor with six D-rings <sup>34</sup>	X   X   X   1
Fuel-fired pre-heater/booster (17,000 BTU)** X X X X	0 17					-	X	X	X	X		
Fuel-fired pre-heater/booster (17,000 BTU)** X X X X Palated metallic front & rear bumper	, i ë					-	X	Ϋ́	X	ΙX		
+ Half-sided step, rear (for trailer hitch)					-			${x}$	Υ	l^		
**Reat insulation, front compartment												
Bumper step, rear, Grey X X X X							X	X	X	X		
Bumper step, rear, Grey X X X X	EVERIOR										TIRES A WHEEL O	
Bumper step, rear, spring-loaded** <sup>1</sup> X X		Ту	Ιχ	Ту	Τχ	Heated & electrically adjustable exterior mirrors	TyT	ΥΙ	Υ	Ιχ		per Single) X X
<ul> <li>Bumpers front/rear primed</li> <li>X</li> <li></li></ul>				<del> </del> ^	†^	i						
Deletion of "model" badge, right rear door				X	X		X	X	Χ	X		XXX
Electric sliding door right	·											X   X   X
Electric sliding door right			X		X		X	X	X	X		X   X   X
Electric sliding door right			X		X							
Electric sliding step		X	Х	X	X	Sliding door two-stage opening	X	X	Χ	Χ	Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super S)	ingle) XXX
* Electrically heated windshield X X X X * Trailer hitch, 5,000 lbs. X				X	X		X					X   X   X
**SAFETY & SECURITY**  **Pactive Distance Assist DISTRONIC***  **Active Distance Assist DISTRONIC**  **Active Distance Assist DISTRONIC Assist DISTRONIC Address Distance Dist				V	V		V	X	Χ	X		
Active Distance Assist DISTRONIC®5	- Lieutrically fleated Willusfileid	IX	ΙΛ	ΙΛ	ΙΛ	- mailer mitori, 5,000 lbs.	1 / [					
• Backup alarm         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X				1.	L		1	\. I				
• Blind Spot Assist <sup>3</sup> X X X X • Comfort Package (seat addition) X X X X X • Swivel Seat Package X X X X • First-aid kit X X X X • Crew Van Comfort Package X X X X X • Swivel Seat Package X X X X X • First-aid kit X X X X • Swivel Seat Package X X X X X • Swivel Seat Package X X X X X • Swivel Seat Package X X X X X • Swivel Seat Package X X X X X • Swivel Seat Package X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X • Swivel Seat Package X X X X X X X X X X X X X X X X X X X						<del></del>						XXX
• Emergency flashlight         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X         X										X		X   X   X   X   X   X   X   X   X   X
<ul> <li>First-aid kit</li> <li>K</li> /ul>	Backup alarm	IV	1 ^				X	ΧI	Χ	X	S. Tive i ocut i donage	[ \
<ul> <li>Fog lamp with cornering light function</li> <li>M X X X X</li> <li>DISTRONIC Addition Premium Package</li> <li>Misfueling prevention for diesel</li> <li>Y X X X</li> <li>Driver Convenience Package</li> <li>Y X X X</li> <li>Exterior Lighting Package</li> <li>X X X X</li> </ul>	Backup alarm     Blind Spot Assist <sup>3</sup>		X	I X	1 /							
Parking Package X X X X X • Exterior Lighting Package X X X X	Backup alarm     Blind Spot Assist <sup>3</sup> Emergency flashlight	X				-	X	X	Χ	X		
	Backup alarm     Blind Spot Assist <sup>3</sup> Emergency flashlight     First-aid kit     Fog lamp with cornering light function	X X X	X	X	X	Crew Van Comfort Package     DISTRONIC Addition Premium Package	X	X	X	X		
Parking Package with 360° camera X X X • Interior Trim Upgrade Package X X X X	Bind Spot Assist <sup>3</sup> Emergency flashlight First-aid kit Fog lamp with cornering light function Misfueling prevention for diesel	X X X X	X X X	X X X	X X X	Crew Van Comfort Package     DISTRONIC Addition Premium Package     Driver Convenience Package	X X X	X X X	X X	X		

#### **SPRINTER CARGO**



TECHNICAL SPECIFICATIONS:	1500 CARGO	, 2500 & 3500
---------------------------	------------	---------------

	15	00				25	00							3500			
Tires		igle				Sir	ngle						ar Wheel	1		Super Single	
Wheelbase Engine	Gas 14	4" Gas	Gas/Diesel	Diesel 14	4" Gas/Diesel	Diesel	Gas/Diesel	'0" Diesel	170' Diesel	' EXT Diesel	Diesel	4" Diesel	170" Diesel	170" EXT Diesel	144" Diesel	170" Diesel	170" EXT Diesel
Drivetrain	4x2	4x2	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x2	4x2	4x2	4x2	4x2	4x2
Roof height	Standard Roof	High Roof	Standard Roof	Standard Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	Standard Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof
Passenger capacity	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3
Rows of seats	One	One	One	One	One	One	One	One	One	One	One	One	One	One	One	One	One
EXTERIOR																	
Length	233.5"	233.5"	233.5"	233.5"	233.5"	233.5"	274.3"	274.3"	290.0"	290.0"	233.5"	233.5"	274.3"	290.0"	233.5"	274.3"	290.0"
Height	96.3"	107.5"	96.3"	100.1"	107.5"	111.3"	107.3"	110.9"	107.0"	110.5"	96.4"	109.1"	108.7"	108.4"	109.4"	109.1"	108.7"
Width - excluding mirrors	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"
Width -	00.01	92.3"	00.01	00.01	00.01	00.01	00.01	00.01	00.01	00.01	05.51	00.01	00.01	00.01	00.011	00.01	00.01
including mirrors	92.3"	92.3	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	95.5"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"
Tire track front	67.2"	67.2"	67.2"	67.8"	67.2"	67.8"	67.2"	67.8"	67.2"	67.8"	66.5"	66.5"	66.5"	66.5"	67.2"	67.2"	67.2"
Tire track rear	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	60.7"	60.7"	60.7"	60.7"	65.2"	65.2"	65.2"
Front overhang BA	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"
Rear overhang																	
(rear axle to end of frame)	49.1"	49.1"	49.1"	49.1"	49.1"	49.1"	63.8"	63.8"	79.6"	79.6"	49.1"	49.1"	63.8"	79.6"	49.1"	63.8"	79.6"
Load height, unloaded (ground to cargo floor)	27.5"	27.4"	27.7"	31.5"	27.6"	31.4"	27.5" <b>G</b> 27.4" <b>D</b>	31.1"	27.2"	30.6"	TBD	28.5"	28.1"	27.7"	29.5"	29.2"	28.9"
Load height, loaded	23.3"	23.4"	23.4"	26.8"	23.4"	26.8"	23.4"	26.8"	23.5"	26.8"	TBD	23.2"	23.2"	23.3"	25.1"	25.2"	25.4"
(ground to cargo floor) Side-door opening height	59.8"	71.6"	59.8"	59.8"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	59.8"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"
Side-door opening																	
width - sliding	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	49.3"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"
Rear cargo door opening height	61.0"	72.7"	61.0"	61.0"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	61.0"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"
Rear cargo door opening width	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	60.7"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"
Turning radius	40.7'	40.7'	40.7'	43.3'	40.7'	43.3'	47.2'	50.2'	47.2'	50.2'	45.3'	45.3'	52.5'	52.5'	45.3'	52.5'	52.5'
(curb-to-curb) Ground to first	20.9"	20.8"	20.9"	24.8"	20.0"	24.7"	20.4"	24.2"	20.4"	24.1"	21.6"	21.41	20.9"	20.0"	21.41	20.7"	20.6"
step-side	20.9	20.6	20.9	24.0	20.8"	24.7	20.4	24.2	20.4	24.1	21.0	21.6"	20.9	20.8"	21.4"	20.7	20.0
INTERIOR	Ι	I	I	I	l		1				ı		l			I	
Headroom (1st row)	47.3"	56.4"	47.3"	47.3"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"	47.3"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"
Shoulder room (1st row)	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"
Hip room (1st row)	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"
	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01	20.01
Legroom (1st row)	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"
Cargo length, front (at floor)	132.9"	132.9"	132.9"	132.9"	132.9"	132.9"	173.6"	173.6"	189.4"	189.4"	103.5"	132.9"	173.6"	189.4"	132.9"	173.6"	189.4"
Cargo length, front (at belt)	128.8"	128.8"	128.8"	128.8"	128.8"	128.8"	169.6"	169.6"	185.3"	185.3"	93.1"	128.8"	169.6"	185.3"	128.8"	169.6"	185.3"
Cargo width between	53.2"	53.2"	53.2"	53.2"	53.2"	53.2"	53.2"	53.2"	53.2"	53.2"	38.5"	38.5"	38.5"	38.5"	48.4"	48.4"	48.4"
wheelhouses	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	30.3	30.3	30.3	30.5	40.4	40.4	40.4
Cargo height, maximum (with trim)	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
Cargo height, maximum (without trim)	67.7"	79.1"	67.7"	67.7"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	64.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"
Maximum floor width	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"
Interior standing beight	47.71	70.18	47.71	47.71	70.1"	70.1"	70.1"	70.18	70.1"	70.1"	45.21	70.11	70.1"	70.1"	70.1"	79.1"	70.11
Interior standing height	67.7"	79.1"	67.7"	67.7"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	65.3"	79.1"	79.1"	79.1"	79.1"	7 7.1	79.1"
CARGO CAPACITY	1		1		1		1				1		1				
Cargo volume (behind last row of seats)	319.0 cu. ft.	372.8 cu. ft.	319.0 cu. ft.	319.0 cu. ft.	372.8 cu. ft.	372.8 cu. ft.	488.1 cu. ft.	488.1 cu. ft.	532.6 cu. ft.	532.6 cu. ft.	222.5 cu. ft.	328.5 cu. ft.	430.1 cu. ft.	469.4 cu. ft.	358.4 cu. ft	469.2 cu. ft.	512.1 cu. ft.
·																	
Maximum roof load	660 lbs.	330 lbs.	660 lbs.	660 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	660 lbs.	330 lbs.	330 lbs.	330 lbs.	300 lbs.	330 lbs.	330 lbs.
Maximum available GCWR	13,550 lbs.	13,550 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.
MAXIMUM CAPABILITIES																	
Maximum payload	3,920 lbs.	3,920 lbs.	4,420 lbs. 4,167 lbs.	3,825 lbs.	4,420 lbs. 4,167 lbs.	3,825 lbs.	4,012 lbs. 3,759 lbs.	3,417 lbs.	3,649 lbs.	3,318 lbs.	TBD	4,488 lbs.	4,135 lbs.	4,058 lbs.	4,488 lbs.	4,135 lbs.	4,058 lbs.
Maximum towing <sup>35</sup>	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.
GVWR	8,550 lbs.	8,550 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,900 lbs.	9,900 lbs.	9,900 lbs.	9,900 lbs.	9,900 lbs.	9,900 lbs.	9,900 lbs.
TWR (maximum loaded	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	749.6 lbs.	750 lbs.	750 lbs.	500 lbs.	750 lbs.	750 lbs.	500 lbs.
trailer weight ratings)																	

#### **SPRINTER CARGO**



#### TECHNICAL SPECIFICATIONS: 3500XD CARGO & 4500

TECHNICAL SPECIFIC	ATIONS: 35	00XD CARG	O & 4500			3500XD						4500						
Tires				Dual Rea	ar Wheel	3500XD				Super Single		Dual Rear Wheel						
Wheelbase			4"			70"		' EXT	144"	170"	170" EXT		4"	170"	170" EXT			
Engine Drivetrain	Diesel 4x2	Diesel 4x4	Diesel 4x2	Diesel 4x4	Diesel 4x2	Diesel 4x4	Diesel 4x2	Diesel 4x4	Diesel 4x2	Diesel 4x2	Diesel 4x2	Diesel 4x2	Diesel 4x2	Diesel 4x2	Diesel 4x2			
Roof height	Standard Roof	Standard Roof	High Roof	Standard Roof	High Roof	High Roof	High Roof											
Passenger capacity Rows of seats	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One			
EXTERIOR	1 One	One	One	One	One	One	One	One	Olle	One	One	I One	One	One	One			
Length	233.5"	233.5"	233.5"	233.5"	274.3"	274.3"	290.0"	290.0"	233.5"	274.3"	290.0"	233.5"	233.5"	274.3"	290.0"			
Height	97.9"	100.1"	109.1"	111.2"	108.7"	110.9"	108.4"	110.6"	109.1"	109.1"	108.7"	97.8"	108.9"	108.5"	108.2"			
Width – excluding mirrors	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"			
Width – including mirrors	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"			
Tire track front	66.5"	66.8"	66.5"	TBD	66.5"	66.8"	66.5"	66.8"	66.5"	67.2"	67.2"	66.0"	66.0"	66.0"	66.0"			
Tire track rear	60.7"	60.7"	60.7"	TBD	60.7"	60.7"	60.7"	60.7"	60.7"	65.2"	65.2"	60.7"	60.7"	60.7"	60.7"			
Front overhang BA	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"			
Rear overhang (rear axle to end of frame)	49.1"	49.1"	49.1"	49.1"	63.8"	63.8"	79.6"	79.6"	49.1"	63.8"	79.6"	49.1"	49.1"	63.8"	79.6"			
Load height, unloaded (ground to cargo floor)	29.3"	30.7"	29.2"	TBD	28.9"	30.3"	28.5"	29.8"	TBD	29.2"	28.9"	29.1"	TBD	28.7"	28.3"			
Load height, loaded (ground to cargo floor)	24.5"	24.9"	24.5"	TBD	24.6"	24.8"	24.7"	24.7"	TBD	24.6"	24.8"	24.5"	TBD	24.6"	24.7"			
Side-door opening height	59.8"	59.8"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	59.8"	71.6"	71.6"	71.6"			
Side-door opening width – sliding	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"			
Rear cargo door opening height	61.0"	61.0"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	61.0"	72.7"	72.7"	72.7"			
Rear cargo door opening width	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"			
Turning radius (curb-to-curb)	45.3'	43.3'	45.3'	43.3'	52.5'	50.2'	52.5'	50.2'	45.3'	52.5'	52.5'	45.3'	45.3'	52.5'	52.5'			
Ground to first step-side	21.7"	24.8"	21.6"	TBD	20.9"	24.3"	20.8"	24.3"	TBD	20.8"	20.7"	21.8"	TBD	21.2"	21.1"			
INTERIOR		1				I	1	I	I			1		I				
Headroom (1st row)	47.3"	47.3"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"	47.3"	56.4"	56.4"	47.3"	56.4"	56.4"	56.4"			
Shoulder room (1st row)	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"			
Hip room (1st row)	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"			
Legroom (1st row)	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"			
Cargo length, front (at floor)	132.9"	132.9"	132.9"	132.9"	173.6"	173.6"	189.4"	189.4"	132.9"	173.6"	189.4"	132.9"	132.9"	173.6"	189.4"			
Cargo length, front (at belt)	128.8"	128.8"	128.8"	128.8"	169.6"	169.6"	185.3"	185.3"	128.8"	169.6"	185.3"	128.8"	129.3"	169.6"	185.3"			
Cargo width between wheelhouses	38.5"	38.5"	38.5"	38.5"	38.5"	38.5"	38.5"	38.5"	38.5"	48.4"	48.4"	38.5"	38.5"	38.5"	38.5"			
Cargo height, maximum (with trim)	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD			
Cargo height, maximum (without trim)	67.7"	67.7"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	67.7"	67.7"	79.1"	79.1"			
Maximum floor width	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"			
Interior standing height	67.7"	67.7"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"	79.1"			
CARGO CAPACITY			1			1		1	ı									
Cargo volume (behind last row of seats)	281.1 cu. ft.	281.1 cu. ft.	328.5 cu. ft.	328.5 cu. ft.	430.1 cu. ft.	430.1 cu. ft.	469.4 cu. ft.	469.4 cu. ft.	328.5 cu. ft.	469.2 cu. ft.	512.1 cu. ft.	281.1 cu. ft.	281.1 cu. ft.	430.1 cu. ft.	469.4 cu. ft.			
Maximum roof load	660 lbs.	660 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	660 lbs.	300 lbs.	330 lbs.	330 lbs.			
Maximum available GCWR	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.			
MAXIMUM CAPABILITIES											1							
Maximum payload	5,706 lbs.	5,419 lbs.	5,706 lbs.	5,320 lbs.	5,276 lbs.	4,978 lbs.	5,188 lbs.	4,901 lbs.	TBD	5,276 lbs.	5,188 lbs.	6,768 lbs.	TBD	6,338 lbs.	6,261 lbs.			
Maximum towing <sup>35</sup>	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	5,000 lbs.	5,000 lbs.	7,500 lbs.	7,500 lbs.	5,000 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	5,000 lbs.			
GVWR	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	12,125 lbs.	12,125 lbs.	12,125 lbs.	12,125 lbs.			
TWR (maximum loaded trailer weight ratings)	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.			

#### **SPRINTER CREW**



			25	3500						
Tires			Sin	gle			Dual Re	ar Wheel	Super	Single
Wheelbase		14	4"		17	0"	144"	170"	144"	170"
Engine	Gas/Diesel	Diesel	Gas/Diesel	Diesel	Gas/Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Drivetrain	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x2	4x2	4x2
Roof height	Standard Roof	Standard Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof
Passenger capacity	5	5	5	5	5	5	5	5	5	5
Rows of seats	Two	Two	Two	Two	Two	Two	Two	Two	Two	Two
EXTERIOR	ı	I	ı		1					
Length	233.5"	233.5"	233.5"	233.5"	274.3"	274.3"	233.5"	274.3"	233.5"	274.3"
Height	96.3"	100.1"	107.5"	111.3"	107.3"	111.3"	109.1"	108.7"	109.4"	109.1"
Width – excluding mirrors	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"
Width – including mirrors	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"
Tire track front	67.2"	67.8"	67.2"	67.8"	67.2"	67.8"	66.5"	66.5"	67.2"	67.2"
Tire track rear	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	60.7"	60.7"	65.2"	65.2"
Front overhang BA	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"
Rear overhang (rear axle to end of frame)	49.1"	49.1"	49.1"	49.1"	63.8"	63.8"	49.1"	63.8"	49.1"	63.8"
	27.5" <b>G</b>		27.4" G		27.3" <b>G</b>					
Load height, unloaded (ground to cargo floor)	27.7" D	31.5"	27.6"D	31.4"	27.4" D	31.1"	28.5"	28.1"	28.5"	28.1"
Load height, loaded (ground to cargo floor)	23.3"	26.8"	23.3"	26.8"	23.4"	26.8"	23.2"	23.2"	23.2"	23.2"
Side-door opening height	59.8"	59.8"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"
Side-door opening width – sliding	49.3"	49.3"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"
Rear cargo door opening height	61.0"	61.0"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"
Rear cargo door opening width	60.7"	60.7"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"
Turning radius (curb-to-curb)	40.7'	43.3'	40.7'	43.3'	47.2'	50.2'	45.3'	52.5'	45.3'	52.5'
Ground to first step-side	20.9"	24.8"	20.8"	24.7"	20.4"	24.2"	21.6"	20.9"	21.6"	20.9"
	20.7	21.0	20.0	21.7	20.1		20	20.7	20	20.7
INTERIOR							T T	T		
Headroom (1st row)	47.3"	47.3"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"
Shoulder room (1st row)	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"
Hip room (1st row)	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"
Legroom (1st row)	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"
Cargo length, front (at floor)	103.5"	103.5"	103.5"	103.5"	144.3"	144.3"	103.5"	144.3"	103.5"	144.3"
Cargo length, front (at belt)	93.1"	93.1"	93.1"	93.1"	133.9"	133.9"	93.1"	133.9"	93.1"	133.9"
Cargo width between wheelhouses	53.1"	53.1"	53.1"	53.1"	53.1"	53.1"	38.5"	38.5"	48.4"	48.4"
Cargo height, maximum	64.1"	64.1"	75.5"	75.5"	75.5"	75.5"	75.5"	75.5"	75.5"	75.5"
(with trim)  Maximum floor width	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"
Interior standing height	65.3"	65.3"	76.7"	76.7"	76.7"	76.7"	76.7"	76.7"	76.7"	76.7"
CARGO CAPACITY Cargo volume										
(behind last row of seats)	222.5 cu. ft.	222.5 cu. ft.	261.3 cu. ft.	261.3 cu. ft.	370.8 cu. ft.	370.8 cu. ft.	261.3 cu. ft.	370.8 cu. ft.	261.3 cu. ft.	370.8 cu. f
Maximum roof load	660 lbs.	660 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.
Maximum available GCWR	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	13,930 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs
MAXIMUM CAPABILITIES										
	4,023 lbs. <b>G</b>		3,946 lbs. <b>G</b>		3,329 lbs. <b>G</b>					
Maximum payload	3,770 lbs. <b>D</b>	3,428 lbs.	3,693 lbs. <b>D</b>	3,351 lbs.	3,594 lbs. <b>D</b>	2,998 lbs.	4,102 lbs.	3,716 lbs.	4,168 lbs.	3,782 lbs
Maximum towing <sup>35</sup>	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs
GVWR TWR (maximum loaded trailer	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,990 lbs.	9,990 lbs.	9,990 lbs.	9,990 lbs.
weight ratings)	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.

#### **SPRINTER CREW**



TECHNICAL SPECIFICATIONS:	3500XD									4500					
Tires			Sir	ngle			Super	Single		Dual Rear Whee	ı				
Wheelbase		1	4"	1		70"	144"	170"		4"	170"				
Engine	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel				
Drivetrain Roof height	4x2 Standard Roof	4x4 Standard Roof	4x2 High Roof	4x4	4x2	4x4	4x2	4x2	4x2 Standard Roof	4x2	4x2				
Passenger capacity	5 Standard Roof	5	Fign Roof	High Roof	High Roof	High Roof	High Roof	High Roof	5 Standard Roof	High Roof	High Root				
Rows of seats	Two	Two	Two	Two	Two	Two	Two	Two	Two	Two	Two				
EXTERIOR Length	233.5"	233.5"	233.5"	233.5"	274.3"	274.3"	233.5"	274.3"	233.5"	233.5"	274.3"				
Height	97.9"	100.1"	109.1"	111.2"	108.7"	110.9"	109.4"	109.1"	97.8"	108.9"	108.5"				
Width – excluding mirrors	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"				
Width – including mirrors	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"	95.5"				
Tire track front	66.5"	66.5"	66.5"	66.8"	66.5"	66.8"	67.2"	67.2"	66.0"	66.0"	66.0"				
Tire track rear	60.7"	60.7"	60.7"	60.7"	60.7"	60.7"	65.2"	65.2"	60.7"	60.7"	60.7"				
Front overhang BA	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"				
Rear overhang (rear axle to end of frame)	49.1"	49.1"	49.1"	49.1"	63.8"	63.8"	49.1"	63.8"	49.1"	49.1"	63.8"				
Load height, unloaded (ground to cargo floor)	29.3"	30.7"	29.2"	30.6"	28.9"	30.3"	29.2"	28.9"	29.1"	29.0"	28.7"				
Load height, loaded (ground to cargo floor)	24.5"	24.9"	24.5"	24.9"	24.6"	24.8"	24.5"	24.6"	24.5"	24.5"	24.6"				
Side-door opening height	59.8"	59.8"	71.6"	71.6"	71.6"	71.6"	71.6"	71.6"	59.8"	71.6"	71.6"				
Side-door opening width – sliding	49.3"	49.3"	51.0"	51.0"	51.0"	51.0"	51.0"	51.0"	49.3"	51.0"	51.0"				
Rear cargo door opening height	61.0"	61.0"	72.7"	72.7"	72.7"	72.7"	72.7"	72.7"	61.0"	72.7"	72.7"				
Rear cargo door opening width	60.7"	60.7"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	60.7"	61.2"	61.2"				
Turning radius (curb-to-curb)	45.3'	43.3'	45.3'	43.3'	52.5'	50.2'	45.3'	52.5'	45.3'	45.3'	52.5'				
Ground to first step-side	21.7"	24.8"	21.6"	20.9"	21.6"	20.8"	20.8"	20.8"	21.8"	20.8"	20.8"				
INTERIOR															
Headroom (1st row)	47.3"	47.3"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"	47.3"	56.4"	56.4"				
Shoulder room (1st row)	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"				
Hip room (1st row)	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"				
Legroom (1st row)	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"				
Cargo length, front (at floor)	103.5"	103.5"	103.5"	103.5"	144.3"	144.3"	103.5"	144.3"	103.5"	103.5"	144.3"				
Cargo length, front (at belt)	93.1"	93.1"	93.1"	93.1"	133.9"	133.9"	93.1"	133.9"	93.1"	93.1"	133.9"				
Cargo width between wheelhouses	38.5"	38.5"	38.5"	38.5"	38.5"	38.5"	48.4"	48.4"	38.5"	38.5"	38.5"				
Cargo height, maximum (with trim)	64.1"	64.1"	75.5"	75.5"	75.5"	75.5"	75.5"	75.5"	64.1"	75.5"	75.5"				
Maximum floor width	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"	70.4"				
Interior standing height	65.3"	65.3"	76.7"	76.7"	76.7"	76.7"	76.7"	76.7"	65.3"	76.7"	76.7"				
CARGO CAPACITY															
Cargo volume (behind last row of seats)	222.5 cu. ft.	222.5 cu. ft.	261.3 cu. ft.	261.3 cu. ft.	370.8 cu. ft.	370.8 cu. ft.	261.3 cu. ft.	370.8 cu. ft.	222.5 cu. ft.	261.3 cu. ft.	370.8 cu				
Maximum roof load	660 lbs.	660 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	330 lbs.	660 lbs.	330 lbs.	330 lbs				
Maximum available GCWR	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 II				
MAXIMUM CAPABILITIES															
Maximum payload	5,320 lbs.	5,022 lbs.	5,243 lbs.	4,945 lbs	4,857 lbs	4,559 lbs	5,309 lbs.	4,923 lbs	6,382 lbs.	6,305 lbs	5,919 lb				
Maximum towing <sup>35</sup>	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs	7,500 lbs.	7,500 lbs	7,500 lb				
GVWR	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs.	11,030 lbs	11,030 lbs.	12,125 lbs.	12,125 lbs.	12,125 II				

#### **SPRINTER PASSENGER**



				。			c
150	250		120	250		120	2500
		Front axle reinforced (standard on 2500 170" WB models only)	+		Suspension for comfort & load protection	X	Х
,	X	Rear spring vibration absorbers	X			X	X
Х	Х	Stabilization Level I					
X	X	Storage net, driver seat backrest	X	X	Three-seater bench in passenger compartment,		Х
Х	Х	Storage net, passenger seat backrest	Х	X	second row (narrow)	Ш	_^
	X	Three-seater bench in passenger compartment,		\ \	Three-seater bench in passenger compartment,     third row (parrow)***	x	χ
X		first row (narrow); includes ISOFIX		^	, ,		Х
1/				_	Window pillar trim	X	Χ
Х	X	Front-to-rear outlet in instrument panel	X	X	Rear window defroster	X	Χ
		Fuel-fired heater booster (17,000 BTU)*	$\perp$			X	X
						X	X
						X	Χ
							^
		Rear cabin heater & vents					_^
			1 //	17	-		
V	W	a High roof	LV	I v	TIRES & WHEELS	IV.	`
		<u> </u>				X	) }
		•				X	7
^		Rear mudflaps	Ηâ		·		
	X	Roof trim				X	)
		Tow hook rear					
X	X	Windows in rear doors	X	X			
X	X	Rearview camera (rearview mirror display)	X	X			
ı	ı	I	1	ı	1		
_							
18	20		100	20		18	2500
_	_			-		ļ-	
X	X						Х
X	X					X	Х
Y	Y		+^				X
^			$\top$		Top opoda miniation, 70 mpn		
Х				_	_		
Ιχ	Ιχ	Heated driver seat	Τx	Ιχ	1		
		Heated front passenger seat	X	ΙX			
					-		
Ιx	Ιx	Flectrically folding exterior mirrors	Тх	Τx	Optional 3-button keys	ΙχΙ	>
						$\frac{1}{X}$	X
		Fuel-fired pre-heater/booster (17,000 BTU)*	1			X	Χ
Х	Х	Instrument cluster with color display				I X I	Χ
X	X	Keys, two additional masters	X	X		X	X
X	X	,				X	X
X	Ιx	-	$+\frac{1}{X}$	Ϋ́		X	X
_	_	• Navigation	X	ΙX	J		
					TIDES & WHEELS		
ΙΥ	Ιχ	Heated & electrically adjustable exterior mirrors	Тх	Тχ		T y I	Υ
						l x l	lχ
		Mounting rails for roof rack	1X			TX	<i>y</i>
X	ΙX					İχ	Х
X	X	Opening limiter, electrically operated sliding door	X	X	- Killis pallited Jet Black		
	Х		X	X	Spare tire carrier deletion	Х	X
X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings	X	X	Spare tire carrier deletion     Spare wheel deletion	X X X X	X
X X X	X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening	X X X	X X X	Spare tire carrier deletion     Spare wheel deletion     Tire Brand Continental	X	X
X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings	X	X X X	Spare tire carrier deletion     Spare wheel deletion     Tire Brand Continental     Tire Brand Kumho	X	X
X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening	X X X	X X X	Spare tire carrier deletion     Spare wheel deletion     Tire Brand Continental	X	X
X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.	X X X	X X X	Spare tire carrier deletion     Spare wheel deletion     Tire Brand Continental     Tire Brand Kumho     Tire Brand Michelin	X X X X	X
X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.      Emergency flashlight	X X X X	X X X	Spare tire carrier deletion     Spare wheel deletion     Tire Brand Continental     Tire Brand Kumho     Tire Brand Michelin  Parking Package	X X X X	X
X X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.      Emergency flashlight     First-aid kit	X X X X	X X X	Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho Tire Brand Michelin  Parking Package Parking Package area deletion	X X X X	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X X X X	X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.      Emergency flashlight	X X X X	X X X	Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho Tire Brand Michelin  Parking Package Parking Package area deletion	X X X X	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X X X X	X X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.      Emergency flashlight     First-aid kit     Fog lamp with cornering light function	X X X X	X X X X	Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho Tire Brand Michelin  Parking Package Parking Package Security alarm with interior motion sensor	X	X X X X
X X X X	X X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.      Emergency flashlight     First-aid kit     Fog lamp with cornering light function	X X X X X	X X X X	Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho Tire Brand Michelin  Parking Package Parking Package with 360° camera Security alarm with interior motion sensor	X	X X X X
X X X X	X X X X X	Opening limiter, electrically operated sliding door     Painted metallic front & rear bumper     Primed side moldings     Sliding door two-stage opening     Trailer hitch, 5,000 lbs.      Emergency flashlight     First-aid kit     Fog lamp with cornering light function	X X X X	X X X X	Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho Tire Brand Michelin  Parking Package Parking Package with 360° camera Security alarm with interior motion sensor  Premium Plus Package Rear Comfort Package	X X X X	X X X X
	X	X	X	X	X	X   X   Front-to-rear outlet in instrument panel   X   X   Storage entropy includes ISOFIX   X   X   Front-to-rear outlet in instrument panel   X   X   X   Front-to-rear outlet in instrument   X   X   X   Front-to-rear outlet instrument panel   X   X	X   X   Front-to-rear outlet in instrument panel   X   X   Storage compartment,   X   W   Front-to-rear outlet in instrument panel   X   X   W   W   W   W   W   W   W   W

#### SPRINTER PASSENGER



#### TECHNICAL SPECIFICATIONS: 1500 & 2500

TECHNICAL SPECIFICATIONS										
Tires		600	2500 Single							
Wheelbase	Single 144"			Single 144"						
Engine	Gas	Gas	Gas/Diesel	Diesel	Gas/Diesel	Diesel	170" Diesel			
Drivetrain	4x2	4x2	4x2	4x4	4x2	4x4	4x2			
Roof height	Standard Roof	High Roof	Standard Roof	Standard Roof	High Roof	High Roof	High Roof			
Passenger capacity	12	12	12	12	12	12	15			
Rows of seats	Four	Four	Four	Four	Four	Four	Five			
EXTERIOR	ı	I			1	I	1			
Length	233.5"	233.5"	233.5"	233.5"	233.5"	233.5"	274.3"			
Height	102.8"	114.2"	102.8"	106.1"	114.2"	117.6"	113.5"			
Width – excluding mirrors	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"	79.5"			
Width – including mirrors	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"	92.3"			
Tire track front	67.2"	67.2"	67.2"	67.8"	67.2"	67.8"	67.2"			
Tire track rear	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"	68.2"			
Front overhang BA	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"	40.2"			
Rear overhang (rear axle to end of frame)	49.1"	49.1"	49.1"	49.1"	49.1"	49.1"	63.8"			
					27.2" <b>G</b>					
Load height, unloaded (ground to cargo floor)	TBD	27.2"	TBD	TBD	27.4" 🖸	30.8"	26.3"			
Load height, loaded (ground to cargo floor)	TBD	23.8"	TBD	TBD	23.8"	27.2"	23.9"			
Side-door opening height	TBD	71.6"	TBD	TBD	71.6"	71.6"	71.6"			
Side-door opening width – sliding	51.1"	51.0"	51.1"	51.0"	51.0"	51.0"	51.0"			
Rear cargo door opening height	TBD	72.7"	TBD	TBD	72.7"	72.7"	72.7"			
Rear cargo door opening width	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"	61.2"			
Turning radius (curb-to-curb)	40.7'	40.7'	40.7'	43.3'	40.7'	43.3'	47.2'			
Ground to first step-side	20.5"	20.5"	20.5"	24.2"	20.5"	24.2"	19.9"			
INTERIOR	<u> </u>			1		I.	1			
Headroom (1st row)	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"	56.4"			
Shoulder room (1st row)	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"	67.4"			
Hip room (1st row)	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"	63.7"			
Legroom (1st row)	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"	38.9"			
Cargo length, front (at floor)	35.9"	35.9"	35.9"	35.9"	35.9"	35.9"	48.4"			
Cargo length, front (at belt)	25.6"	25.6"	25.6"	25.6"	25.6"	25.6"	37.9"			
Cargo width between wheelhouses	53.0"	53.0"	53.0"	53.0"	53.0"	53.0"	53.0"			
Cargo height, maximum (with trim)	TBD	TBD	TBD	TBD	TBD	TBD	TBD			
Maximum floor width	69.8"	69.8"	69.8"	69.8"	69.8"	69.8"	69.8"			
Interior standing height	TBD	75.5"	TBD	TBD	75.5"	75.5"	75.5"			
CARGO CAPACITY										
Cargo volume (behind last row of seats)	78.6 cu. ft.	78.6 cu. ft.	78.6 cu. ft.	78.6 cu. ft.	78.6 cu. ft.	78.6 cu. ft.	111.2 cu. ft.			
Maximum roof load	243 lbs.	243 lbs.	243 lbs.	243 lbs.	243 lbs.	243 lbs.	243 lbs.			
Maximum available GCWR	13,930 lbs.	13,550 lbs.	13,930 lbs.	13,930 lbs.	13,931 lbs.	13,931 lbs.	9,480 lbs.			
MAXIMUM CAPABILITIES										
					3,417 lbs. <b>G</b>					
Maximum payload	TBD	2,917 lbs.	TBD	TBD	3,142 lbs. <b>D</b>	2,877 lbs.	3,031 lbs.			
Maximum towing <sup>35</sup>	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	5,000 lbs.	0 lbs.			
GVWR	9,050 lbs.	8,550 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,050 lbs.	9,480 lbs.			
TWR (maximum loaded trailer	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	500 lbs.	0 lbs.			
weight ratings)										

#### **SPRINTER CAB CHASSIS/CUTAWAY**



ADDITIONAL STANDARD FEATURES (CAB CHASSIS/CUTAWAY)	00XD	000	• [	00XD		8		00XD	8	
MECHANICAL	35	4.5		35	;	42		35	45	ı
Aux. fuel sending unit with fuel tap	X	ΤX	Deactivation lamp monitoring failure	X		X	Front axle reinforced		X	1
Axle ratio 4.182	X	X	Deletion of end crossmember	X	$  \rangle$	X	Stabilization Level II	X	X	1
EXTERIOR			TIRES & WHEELS				SAFETY & SECURITY			
Clearance lights pre-wiring	X	ΙX	5.5 J x 16 steel wheels	X		Χ	Longitudinal member reinforcement	X	X	1
Exterior mirror extended (96")	X	X	Dual rear wheel tires	X		X				Ī
Identification lamps	X	X	Provisional spare wheel bracket frame mounted	X		X				
			Spare wheel	X		X				
			Tires LT 215/85 R16	X	$\Box$	ΧĪ				

Identification lamps	X X • Provisional spare wheel bracket frame mounted	X   X		
	Spare wheel	XX		
	Tires LT 215/85 R16	XX		
OPTIONAL FEATURES (CAB CHASSIS/CUTAWAY)				
MECHANICAL				
· Additional battery for retrofit consumers, co-driver seat bas	se XX X • Cruise control	X   X   •	Parametric Special Module (PSM)	X
Additional battery for retrofit consumers, engine compartment	X X   Cutoff relay for additional battery  End crossmember bolted	X X ·	Speed limitation, 65 mph (standard on 4500 model) Top speed limitation, 75 mph	X
Additional DIN-slots	X X • Engine oil level display at cold start	$\rightarrow$	Trailer crossmember 7,500 lbs. capacity	X
AGM battery 12V 95Ah 850A	X X • Front axle reinforced (standard on 4500 model)	X	, , ,	
Axle ratio 3.923	X X • Fuel gauge, optimized for aux. fuel tap	XX		
SEATING				
Artico Man-made Leather Black	X X • Heated driver seat	XXX		
Fabric, Caluma Black	X X • Heated front passenger seat	XX		
INTERIOR				
115V socket	X X • Fuel-fired pre-heater/booster (17,000 BTU)	X   X   •	Overhead storage slot, front center	X
Acoustic Package	X X • Heat insulation, front compartment	X X ·	Rear heater prep	l X l
Cab rear wall liner	X X • Hinged lid for storage compartment	X X •	Rear wall deletion - Cab Chassis	I X I
Charging Package, dashboard	X X • Illuminated front exits	X   X   •	Satellite radio	X
Cigarette lighter & ash cup, front	X X • Instrument cluster with color display	X   X   •	THERMOTRONIC automatic climate control	X
Door-mounted assist handle, driver & passenger	X X • Keys, two additional masters	X   X   •	Tray for smartphones incl. wireless charging	X
Electrical pre-installation for load compartment lighting	X X • Leather steering wheel		Window in cab rear wall	X
Electrically heated windshield*	X X • Multifunction steering wheel	XX		
Fuel-fired heater booster (17,000 BTU)	X X • Navigation	XX		
EXTERIOR		TI	IRES & WHEELS (CONTINUED)	
Bumpers/detachable body parts painted body color	X X • Third brake light pre-wiring	X   X   •	Rims painted Jet Black	TXT
Bumpers front/rear primed	X X • Wire harness tail lamp with extended wiring		Spare tire carrier deletion	X
DEF fluid filler cap – lockable	X X • Wiring for additional turn signals		Spare wheel deletion	X X X
Deletion of "model" badge, right rear door	X X TIRES & WHEELS		Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single)	IXI
Heated & electrically adjustable exterior mirrors	X X • 285/65 R 16 C SUPER-SINGLE-TIRES (Super Single)	X   •	Tire Brand Continental	X
Primed side moldings	X X • M+S winter tires	X X •	Tire Brand Michelin*	X X X
Tail lamp deletion	X X • Rims painted Arctic White		Wheel chocks	X

### Tail lamp deletion SAFFTY & SECURITY

SAFETY & SECURITY							
Active Distance Assist DISTRONIC®5	XX	( • First-aid kit	Χ	Χ	Pre-wiring rearview camera (head unit display)	X	Τ
Backup alarm	XX	Fog lamp with cornering light function	Χ	Χ	Pre-wiring rearview camera (rearview mirror display)	X	Τ
Emergency flashlight	XX	Misfueling prevention for diesel	Χ	Χ	Security alarm with interior motion sensor	X	+

Emergency flashlight	X	X	Misfueling prevention for diesel	ΙX	X	Security alarm with interior motion sensor	X   X
OPTIONAL PACKAGES							
Bench Seat Package	X	X	Comfort Plus Package	Χ	X	Premium Package	XX
Chrome Grille Package	X	X	DISTRONIC Addition Premium Package	Χ	X	Premium Plus Package	XX
Comfort Package	X	X	Driver Convenience Package	Χ	X	Swivel Seat Package	XX
Comfort Package (seat addition)	X	X	Exterior Lighting Package	Χ	X		

For a complete listing of features included in each package, build your van at MBVans.com

#### TECHNICAL SPECIFICATIONS: 3500XD & 4500

Engine	Diesel	Diesel	Diesel	Diesel	Diesel
Drivetrain	4x2	4x2	4x2	4x2	4x2
Passenger capacity	2-3	2-3	2-3	2-3	2-3
Rows of seats	One	One	One	One	One
EXTERIOR					
Length	245.9"	273.5"	273.5"	245.9"	273.5"
Height	94.1"	93.7"	93.5"	94.4"	94.0"
Width – excluding mirrors	79.5"	79.5"	79.5"	79.5"	79.5"
Width – including mirrors	95.5"	95.5"	95.5"	95.5"	95.5"
Front track	66.3"	66.3"	67.2"	66.3"	66.3"
Rear track	60.7"	60.7"	65.2"	60.7"	60.7"
Front overhang	15.8"	15.8"	15.8"	15.8"	15.8"
Rear overhang (rear axle to end of frame)	61.4"	63.0"	63.0"	61.4"	63.0"
Turning diameter (curb-to-curb)	45.3'	52.5'	52.5'	45.3'	52.5'
Cab length	99.4"	99.4"	99.4"	99.4"	99.4"
Tan of fuance to top of oak	( 4 4 11	(4.48	(4.41	(4.41	( 4 4 11

27.0"

27.0"

26.9"

Dual Rear Wheel Super Single Dual Rear Wheel

144" 170" 170" 144" 170"

#### TECHNICAL SPECIFICATIONS: 3500XD & 4500

		3500XD		45	00	
Tires	Dual Rear Wheel		Super Single	Dual Rear Wheel		
Wheelbase	144"	170"	170"	144"	170"	
Engines	Diesel	Diesel	Diesel	Diesel	Diesel	
Drivetrain	4x2	4x2	4x2	4x2	4x2	
Passenger capacity	2-3	2-3	2-3	2-3	2-3	
Rows of seats	One	One	One	One	One	


INTERIOR					
Headroom	47.3"	47.3"	47.3"	47.3"	47.3"
Shoulder room	67.4"	67.4"	67.4"	67.4"	67.4"
Hip room	63.7"	63.7"	63.7"	63.7"	63.7"
Legroom	38.9"	38.9"	38.9"	38.9"	38.9"

CARGO CAPACITY					
Max. available GCWR	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.	15,250 lbs.

MAXIMUM CAPABILITIES	5				
Maximum payload	6,356 lbs.	6,268 lbs.	6,268 lbs.	7,429 lbs.	7,341 lbs.
Maximum towing <sup>35</sup>	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs.	7,500 lbs
GVWR	11,030 lbs.	11,030 lbs.	11,030 lbs.	12,125 lbs.	12,125 lbs
TWR (maximum loaded trailer weight ratings	750 lbs.	750 lbs.	750 lbs.	750 lbs.	750 lbs.


#### **EXTERIOR & INTERIOR**

#### **EXTERIOR: NON-METALLIC**

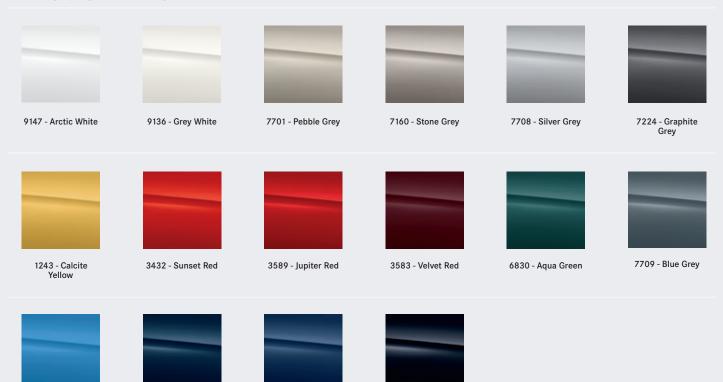


#### **EXTERIOR: METALLIC**

5362 - Brilliant Blue



**INTERIOR** 



5389 - Steel Blue



5957 - Vanda Blue

Grey Metallic



5524 - Black Blue









VF6 - Black Leatherette

VF7 - Maturin Black Upholstery

**ACCESSORIES HIGHLIGHTS** 

- All-season floor mats
- Loading roller (for basic carrier bars)
- Roof rack basic carrier
- Trailer hitch
- Wind deflectors for front windows, set
- Roof box
- Folding table (requires base module)

Contact dealer for full list of accessories.

For paint availability, please contact your dealer.

VF4 - Caluma Black Upholstery

#### **ENDNOTES**

TBD values to be updated at a later date

- 1. Active Brake Assist may not be sufficient to avoid an accident. It does not react to certain stationary objects, nor recognize or predict the curvature and/or lane layout of the road or every movement of vehicles ahead. It is the driver's responsibility at all times to be attentive to traffic and road conditions, and to provide the steering, braking and other driving inputs necessary to retain control of the vehicle. Drivers are cautioned not to wait for the system's alerts before braking, as that may not afford sufficient time and distance to brake safely. See Operator's Manual for system's operating speeds and additional information and warnings.
- Driving while drowsy or distracted is dangerous and must be avoided. ATTENTION ASSIST® may be insufficient to alert
  a fatigued or distracted driver and cannot be relied on to avoid an accident or serious injury.
- 3. Blind Spot Assist is a warning system only, and may not be sufficient to avoid all accidents involving vehicles in your blind spot and does not estimate the speed of approaching vehicles. It should not be used as a substitute for driver awareness and checking of surrounding traffic conditions. See Operator's Manual for system's operating speeds and additional information and warnings.
- 4. Rear Cross-Traffic Alert is not a substitute for actively checking around the vehicle for any obstacles or people. It may not detect certain objects based on their size, path, proximity or speed and angle of approach, or due to sensor obstruction, and does not control steering angle. See Operator's Manual for additional information, tips and warnings.
- 5. Active Distance Assist DISTRONIC® is no substitute for active driving involvement. It does not adapt cruising speed in response to stationary objects, nor does it predict the curvature and lane layout of the road ahead or the movement of vehicles ahead. It is the driver's responsibility at all times to be attentive to traffic and road conditions, and to provide the steering, braking and other driving inputs necessary to retain control of the vehicle. Drivers are cautioned not to wait for the system's alerts before braking, as that may not afford sufficient time and distance to brake safely. Braking effectiveness also depends on proper brake maintenance, and tire and road conditions. See Operator's Manual for system's operating speeds and additional information and warnings.
- 6. Rearview camera does not audibly notify driver of nearby objects and is not a substitute for actively checking around the vehicle for any obstacles or people. Images displayed may be limited by camera field of view, weather, lighting conditions, and the presence of dirt, ice, or snow on the camera.
- Crosswind Assist can engage automatically when sensing dangerous wind gusts at highway speeds exceeding 50 mph. Performance is limited by wind severity and available traction, which snow, ice, and other conditions can affect. Always drive carefully, consistent with conditions.
- 8. No system, regardless of how advanced, can overcome the laws of physics or correct careless driving. Please always wear your seat belt. Performance is limited by available traction, which snow, ice, and other conditions can affect. Always drive carefully, consistent with conditions. Best performance in snow is obtained with winter tires.
- 9. Warning: the forces of a deploying airbag can cause serious or fatal injuries to a child under age 13. The safest seating position for your child is in a rear seat, belted into an appropriate, properly installed child seat, or correctly wearing a seat belt if too large for a child seat. See Operator's Manual for additional warnings and information on airbags, seat belts, and child seats.
- Active Lane Keeping Assist may be insufficient to alert a fatigued or distracted driver of lane drift and cannot be relied on to avoid an accident or serious injury.
- 11. Requires the use of ultra-low-sulfur diesel fuel. Mercedes-Benz Sprinters are approved to use B5 biodiesel (approved diesel fuel with a maximum 5% biodiesel content). The only approved biodiesel content is one that both meets ASTM D6751 specifications and has the oxidation stability necessary to prevent deposit-/corrosion-related damages to the system (min, 6h, proven by EN14112 method). Please see your service station for further information. If the B5 biodiesel blend does not clearly indicate that it meets the above standards, please do not use it. The Mercedes-Benz Vans New Vehicle Limited Warranty does not cover damage caused by fuel standards not approved by Mercedes-Benz Vans.
- 12. Driver is responsible for monitoring fluid levels and tire pressure between service visits. See Maintenance Booklet
- MY19 Sprinter won the 2019 ALG Residual Value Award in the Fullsize Commercial Van segment. ALG is the industry benchmark for residual values and depreciation data, www.alg.com.
- 14. Mercedes PRO connect is available for the Contiguous US, Hawaii, and Alaska with the MY20 Sprinter. Contact an authorized Mercedes-Benz Vans dealership for more information.
- 15. When the Emergency Call System is triggered, the following data are automatically transmitted: vehicle identification number, GPS position, direction of travel, time of the emergency call, language setting, and number of occupants in the cab. The Emergency Call System is activated from the moment the vehicle is delivered to the customer following a sale. No separate terms of use have to be accepted. The Communication Module for Digital Services and the emergency call button are necessary for use of the Emergency Call System service.
- 16. The information from this service is shown on the touchscreen of the multimedia system. Live Traffic Information can only be used in conjunction with the MBUX multimedia system with 7-inch touchscreen and navigation or the MBUX multimedia system with 10.25-inch touchscreen.
- 17. A valid subscription to Live Traffic Information is necessary to use Car-to-X Communication. Car-to-X Communication can only be used in conjunction with the MBUX multimedia system with 7-inch touchscreen and navigation or the MBUX multimedia system with 10.25-inch touchscreen. Only the data of vehicles directly affected by the event and equipped with Car-to-X Communication are processed, therefore you may not always receive a timely warning of hazards through this system.
- 18. Update times, content, and installation times can vary. These are activated when the vehicle is delivered. Updates to the Communication Module (LTE) are automatic, as otherwise certain applications might no longer work. You can access the current status of the software versions in your vehicle via the Mercedes PRO Portal.
- 19. The wireless Internet in the Car is provided by AT&T and created via an integrated SIM card. A contract must be made with AT&T in order to access data services, and this contract can be made via the Mercedes PRO Portal or infotainment system. In addition to a data contract with AT&T, either an MBUX multimedia system with 7-inch touchscreen and navigation or satellite radio or the MBUX multimedia system with 10.25-inch touchscreen is required for the Internet in the Car service. Additional costs may apply depending on the amount of data used.
- 20. In order for us to offer you this service, data is transferred from the vehicle to Mercedes-Benz/Freightliner Sprinter. This data includes the vehicle identification number, mileage, service code (A or B), as well as remaining time and mileage until the next service is due and information on the brake system and coolant.
- 21. The Online Map Update service is only available in conjunction with the MBUX multimedia system with 7-inch touchscreen and navigation or the MBUX multimedia system with 10.25-inch touchscreen. The service must first be activated and the region for the map update selected in the Mercedes PRO Portal.

- 22. You can only use the Navigation Functions service in conjunction with the MBUX multimedia system with 7-inch touchscreen and navigation or the MBUX multimedia system with 10.25-inch touchscreen. Before use, some of the applications must first be activated via the Mercedes PRO Portal.
- 23. You can only use the Multimedia Functions service in conjunction with the MBUX multimedia system with 7-inch touchscreen and navigation or the satellite radio or with the MBUX multimedia system with 10.25-inch touchscreen. Before use, some of the applications must first be activated via the Mercedes PRO Portal. For various functions (Internet Radio and Browser), additional data volume is necessary which can be purchased via the Internet in the Car service.
- 24. The Remote Control function via the Mercedes PRO connect App makes it possible for you to view the status of the doors and windows. The driver is also able to unlock the vehicle using a code via the Mercedes PRO connect App and also check the status of and operate the auxiliary heater. This function is only available in conjunction with an optional auxiliary heater (hot-water heater).
- 25. The available data can vary according to the vehicle model. The tire pressure can only be shown on certain model configurations. Display of the AdBlue<sup>®</sup> level is only available in conjunction with the optional SCR Generation 3 emissions control and only available with diesel models.
- 26. To safeguard the driver's privacy, he/she can switch off the vehicle tracking function via the Mercedes PRO connect App when making private journeys or traveling to and from work.
- 27. Messages from all drivers are visible to the fleet manager. Using the Vehicle Management Tool, he/she can, in turn, contact any driver individually with a message. If the Send2Car function is included in the subscription, a POI can be sent directly to the vehicle's navigation system. The Vehicle Operations service is additionally required to send POIs directly from the Vehicle Management Tool.
- 28. If you wish to use the Digital Driver's Log for your tax documentation, be sure to verify in advance whether the form and the information provided meets the fiscal requirements of your local tax authority. It provides three categories in which to categorize journeys: business journey, private journey, or commute.
- 29. The Theft Warning is shown in the chosen communication channel if the vehicle crosses preset geofences in a certain time period or if the optional Security alarm with interior motion sensor system sounds the alarm. Only in conjunction with the optional Security alarm with interior motion sensor.
- 30. In order to prevent distracted driving, the use of the Mercedes PRO connect App is not permitted while operating a motor vehicle. If used while operating a motor vehicle, there is an increased risk of endangering oneself and others. Please follow your local laws and restrictions.
- 31. After the Mercedes PRO connect go-live in the Sprinter, there will be a Vehicle Management Tool for the factory equipped solution and Communication Module.
- 32. The availability of services in addition to the integrated Communication Module depends on the network coverage of the mobile network provider. The Communication Module (LTE) is not available in the US Virgin Islands or Puerto Rico.
- 33. Apple CarPlay® is a product of Apple Inc. Android™ Auto is a product of Google Inc. Device and app providers' terms and privacy statements apply. Requires connected compatible device and data plan. Apps, content and features are selected solely by their providers. Connection to apps and streaming services may be limited by the device's network connection. Data usage is routed through device and subject to fees, charges and restrictions in user's wireless plan. Vehicle's factory audio/information interface, including COMAND® navigation, may not be used simultaneously with Apple CarPlay® or Android™ Auto. When Apple CarPlay® or Android™ Auto with such is use, the steering-wheel voice control button accesses Siri® or Google voice recognition software for voice commands.
- 34. Unsecured cargo can become hazardous in a collision. Always secure cargo.
- 35. Maximum permissible gross weight of the trailer, if the trailer is equipped with a separate functional braking system. Please make sure to comply with local trailer load regulations.
- 36. MasterSolutions™ program vehicles are custom, special-order only vehicles modified by the MasterSolutions™ provider of your choice. Although the MBUSA warranty does not apply to the modifications, separate warranties offered by the MasterSolutions™ provider may apply. Details are available from your local dealer.
- 37. Actual rates, terms, down payment, and program eligibility will be determined by the Mercedes-Benz Financial Services Credit Team based upon creditworthiness of customer.
- 38. TRAC leases are limited to motor vehicles leased to businesses and used at least 50% of the time for business purposes. Consult your tax or financial advisor for tax and accounting treatments.
- 39. The Mercedes-Benz Vans Roadside Assistance Program is available for vehicles covered under warranty and includes such services as towing, jump start in the event of a dead battery, and assistance with the installation of a spare tire. Service charges apply for out-of-warranty vehicles.
- 40. Traffic Sign Assist is not a substitute for driver awareness to posted speed limits and other conditions. Driver is responsible for safely operating vehicle in accordance with local traffic laws and driving conditions.

©2020 Mercedes-Benz USA, LLC, One Mercedes-Benz Drive, Sandy Springs, GA, 30328 1-877-762-8267

All illustrations and specifications contained in this brochure are based on the latest product information available at the time of publication. All measurements are according to SAE J1100. Mercedes-Benz reserves the right to make changes at any time, without notice, to colors, materials, equipment, specifications, and models, warraitons in colors shown are due to reproduction variations of the printing process. Illustrations may include test situations. Some vehicles may be shown with non-U.S. equipment. Some vehicles are shown with optional equipment available at extra cost. Some optional equipment may not be available individually and/or on all models. For current information regarding the range of models, standard features, optional equipment, and/or colors available in the U.S. and their pricing, please contact your nearest authorized Mercedes-Benz Vans dealer. All rights reserved. Bluetooth\* is a registered trademark of Bluetooth SIG, inc.

www.MBVans.com

Printed in the U.S.A

